326
Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications 2

- Engine 2
- Swing Mechanism 2
- Weights 2
- Track 2
- Drive 2
- Hydraulic System 2
- Service Refill Capacity 2
- Standards 2
- Sound Performance 2
- Operating Weights and Ground Pressures 3
- Major Component Weights 4
- Dimensions 5
- Working Ranges and Forces 7
- Bucket Specifications and Compatibility 9
- Attachments Offering Guide 10

Standard and Optional Equipment 11

Dealer Installed Kits and Attachments 13

Cab Options 14

326 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C7.1	
Engine Power – ISO 9249	150 kW	201 hp
Engine Power – ISO 14396	151 kW	202 hp
Bore	105 mm	4 in
Stroke	0 mm	0 in
Displacement	7.01 L	428 in^3

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Rating at 2,200 rpm.

Swing Mechanism

Swing Speed	10.5 rpm	
Maximum Swing Torque	106 kN·m	78,180 lbf-ft

Weights

Operating Weight	25 600 kg	56,500 lb

- Long undercarriage, Reach boom, R2.95 m (9'7") stick, GDX 1.20 m^3 (1.57 yd^3) bucket, 600 mm (24") triple grouser shoes and 4.6 mt (10,140 lb) counterweight.

Operating Weight	29 200 kg	64,300 lb

- Long undercarriage, Super Long Reach boom, 7.85A (25'9") stick, 0.57 m^3 (0.75 yd^3) Ditch Cleaning bucket, 790 mm (31") triple grouser shoes and 6.7 mt (14,770 lb) counterweight.

Track

Standard Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	790 mm	31 in
Number of Shoes (each side)	51	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	226 kN	50,807 lbf

Hydraulic System

Main System – Maximum Flow – Implement	515 L/min	136 gal/min
Maximum Pressure – Equipment – Implement	35 000 kPa	5,075 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,510 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	28 400 kPa	4,118 psi
Boom Cylinder – Bore	135 mm	5 in
Boom Cylinder – Stroke	1305 mm	51 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1660 mm	65 in
Bucket Cylinder – Bore	130 mm	5 in
Bucket Cylinder – Stroke	1156 mm	46 in

Service Refill Capacity

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	10 L	2.6 gal
Final Drive (each)	5.5 L	1.5 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank (including suction pipe)	147 L	38.8 gal
DEF Tank	41 L	10.8 gal

Standards

Brakes	ISO 10265: 2008
Cab/FOGS	ISO 10262: 1998
Cab/ROPS	ISO 12117-2: 2008

Sound Performance

ISO 6395 (external)	103 dB(A)
ISO 6396 (inside cab)	70 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Operating Weights and Ground Pressures

	600 mm (24") Triple Grouser Shoes		700 mm (28") Triple Grouser Shoes		790 mm (31") Triple Grouser Shoes		600 mm (24") Double Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Frame with Track Rollers and Carrier Rollers								
4.6 mt (10,140 lb) Counterweight + Long Undercarriage Base Machine								
Reach Boom + 2.95 m (9'8") Stick + 1.20 m^3 (1.57 yd^3) GDX Bucket	25 600 (56,500)	51 (7.4)	26 000 (57,200)	44 (6.4)	26 300 (57,900)	40 (5.8)	25 600 (56,300)	51 (7.4)
HD Reach Boom + 2.95 m (9'8") HD Stick + 1.20 m^3 (1.57 yd^3) GDX Bucket	25 900 (57,000)	52 (7.5)	26 200 (57,700)	45 (6.5)	26 500 (58,500)	40 (5.8)	25 800 (56,800)	48 (7.0)
Reach Boom + 2.5 m (8'2") Stick + 1.20 m^3 (1.57 yd^3) GDX Bucket	25 600 (56,300)	51 (7.4)	25 900 (57,100)	44 (6.4)	26 200 (57,800)	40 (5.8)	25 500 (56,200)	47 (6.9)
6.7 mt (14,770 lb) Counterweight + Long Undercarriage Base Machine								
Super Long Reach Boom + Super Long Reach 9.85 m (25'9") Stick + 0.57 m^3 (0.75 yd^3) Ditch Cleaning Bucket	28 500 (62,800)	57 (8.2)	28 900 (63,600)	49 (7.2)	29 200 (64,300)	44 (6.4)	28 400 (62,600)	53 (7.7)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

Major Component Weights

	kg	lb
Base Machine Weight: including upperframe, undercarriage, counterweight, boom cylinders, without boom, stick, bucket, stick cylinder, bucket cylinder, tracks, without fuel, operator		
With 4.6 mt (10,140 b) Counterweight	17 400	38,360
With 6.7 mt (14,770 lb) Counterweight	19 500	42,990
Track Shoes:		
600 mm (24") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes	3320	7,320
700 mm (28") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes	3670	8,090
790 mm (31") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes with Step Extension for ISO 2867	4000	8,820
600 mm (24") Width, 13 mm (0.51") Thick, Double Grouser Track Shoes	3250	7,160
Two Boom Cylinders	460	1,010
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	460	1,010
Counterweights:		
4.6 mt (10,140 lb) Counterweight	4600	10,140
6.7 mt (14,770 lb) Counterweight	6700	14,770
Undercarriage (without track shoes):		
Long Undercarriage	5500	12,130
Booms (including lines, pins, stick cylinder):		
Reach Boom 5.9 m (19'4")	2050	4,520
HD Reach Boom 5.9 m (19'4")	2180	4,810
Super Long Reach Boom 10.2 m (33'6")	3190	7,030
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R2.95CB (9'8")	1300	2,870
HD Reach Stick R2.95CB (9'8")	1390	3,060
Reach Stick R2.5CB (8'2")	1220	2,690
Super Long Reach Stick 7.85A (25'9")	1600	3,530
Buckets (without linkage,with tips and side cutters):		
1.50 m^3 (1.96 yd^3) GDX CB Linkage	1200	2,650
1.30 m^3 (1.70 yd^3) HDX CB Linkage	1240	2,730
1.20 m^3 (1.57 yd^3) GDX CB Linkage	1070	2,360
1.10 m^3 (1.44 yd^3) GDX CB Linkage	1020	2,250
0.57 m^3 (0.75 yd^3) DC A Linkage	390	860
Quick Couplers:		
Pin Grabber QC CB with Pins	530	1,170
Pin Grabber QC CB without Pins	500	1,100

Refer to page 9 for a complete list of bucket options.

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

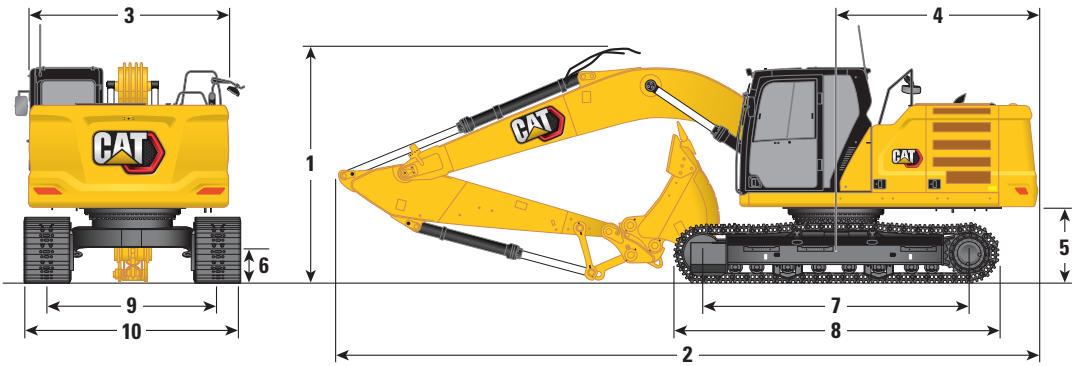

Boom Options	Reach Boom 5.9 m (19'4")				HD Reach Boom 5.9 m (19'4")	
Stick Options	Reach Stick				HD Reach Stick	
	R2.95CB (9'8")		R2.5CB (8'2")		R2.95CB (9'8")	
1 Machine Height						
Cab Height	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
FOGS Height	3140 mm	10'4"	3140 mm	10'4"	3140 mm	10'4"
Guardrails/Handrails Height	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3250 mm	10'8"	3430 mm	11'3"	3250 mm	10'8"
With Boom/Stick Installed	3120 mm	10'3"	3200 mm	10'6"	3120 mm	10'3"
With Boom Installed	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
2 Machine Length:						
With Boom/Stick/Bucket Installed	10 060 mm	33'0"	10 090 mm	33'1"	10 060 mm	33'0"
With Boom/Stick Installed	10 040 mm	32'11"	10 090 mm	33'1"	10 040 mm	32'11"
With Boom Installed	8720 mm	28'7"	8720 mm	28'7"	8720 mm	28'7"
3 Upperframe Width without Walkways	2940 mm	9'8"	2940 mm	9'8"	2940 mm	9'8"
4 Tail Swing Radius	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
5 Counterweight Clearance without Shoe Lug	1060 mm	3'6"	1060 mm	3'6"	1060 mm	3'6"
6 Ground Clearance without Shoe Lug	440 mm	1'5"	440 mm	1'5"	440 mm	1'5"
7 Length To Center of Rollers	3830 mm	12'7"	3830 mm	12'7"	3830 mm	12'7"
8 Track Length with Triple Grouser Shoes	4640 mm	15'3"	4640 mm	15'3"	4640 mm	15'3"
9 Track Gauge	2590 mm	8'6"	2590 mm	8'6"	2590 mm	8'6"
10 Track Width:						
600 mm (24") Shoes	600 mm	2'0"	600 mm	2'0"	600 mm	2'0"
700 mm (28") Shoes	700 mm	2'4"	700 mm	2'4"	700 mm	2'4"
790 mm (31") Shoes	790 mm	2'7"	790 mm	2'7"	790 mm	2'7"
Undercarriage Width (with steps/without steps)						
600 mm (24") Shoes (long undercarriage)	3190 mm	10'6"	3190 mm	10'6"	3190 mm	10'6"
700 mm (28") Shoes (long undercarriage)	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"
790 mm (31") Shoes (long undercarriage)	3380 mm	11'1"	3380 mm	11'1"	3380 mm	11'1"
Bucket Type	GDX		GDX		GDX	
Bucket Capacity	1.20 m^3	1.57 yd^3	1.20 m^3	1.57 yd^3	1.20 m^3	1.57 yd^3
Bucket Tip Radius	1600 mm	5'3"	1660 mm	5'5"	1660 mm	5'5"

326 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

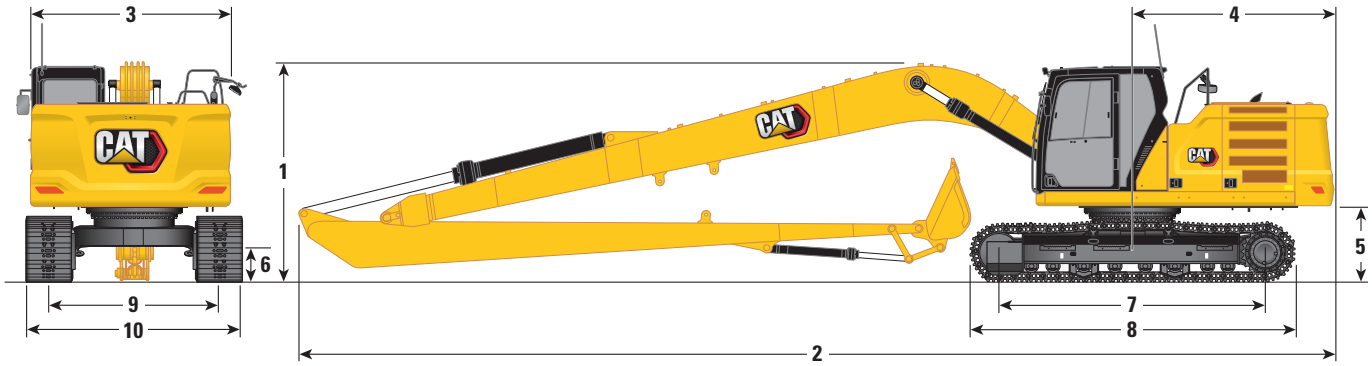

Boom Options	Super Long Reach Boom 10.2 m (33'6")	
Stick Options	**Super Long Reach Stick 7.85A (25'9")**	
1 Machine Height		
Cab Height	3000 mm	9'10"
FOGS Height	3140 mm	10'4"
Guardrails/Handrails Height	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3160 mm	10'4"
With Boom/Stick Installed	3160 mm	10'4"
With Boom Installed	3000 mm	9'10"
2 Machine Length:		
With Boom/Stick/Bucket Installed	14 350 mm	47'1"
With Boom/Stick Installed	14 350 mm	47'1"
With Boom Installed	13 250 mm	43'6"
3 Upperframe Width without Walkways	2940 mm	9'8"
4 Tail Swing Radius	3000 mm	9'10"
5 Counterweight Clearance without Shoe Lug	1060 mm	3'6"
6 Ground Clearance without Shoe Lug	440 mm	1'5"
7 Length To Center of Rollers	3830 mm	12'7"
8 Track Length with Triple Grouser Shoes	4640 mm	15'3"
9 Track Gauge	2590 mm	8'6"
10 Track Width:		
600 mm (24") Shoes	600 mm	2'0"
700 mm (28") Shoes	700 mm	2'4"
790 mm (31") Shoes	790 mm	2'7"
Undercarriage Width (with steps/without steps)		
600 mm (24") Shoes (long undercarriage)	3190 mm	10'6"
700 mm (28") Shoes (long undercarriage)	3290 mm	10'10"
790 mm (31") Shoes (long undercarriage)	3380 mm	11'1"
Bucket Type	Ditch Cleaning	
Bucket Capacity	0.57 m^3	0.75 yd^3
Bucket Tip Radius	1070 mm	3'6"

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

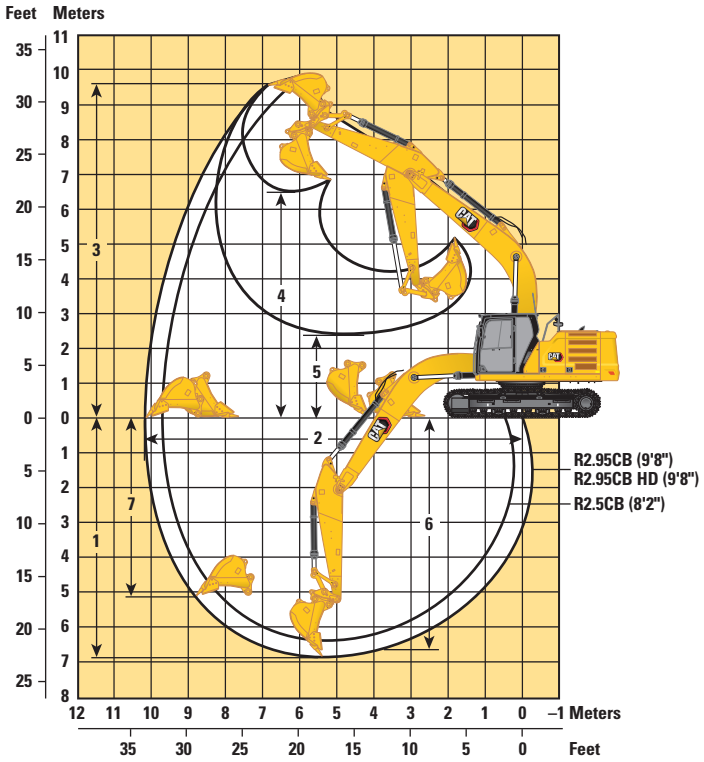

Boom Options	Reach Boom 5.9 m (19'4")				HD Reach Boom 5.9 m (19'4")	
Stick Options	Reach Stick				HD Reach Stick	
	R2.95CB (9'8")		R2.5CB (8'2")		R2.95CB (9'8")	
1 Maximum Digging Depth	6820 mm	22'5"	6370 mm	20'11"	6820 mm	22'5"
2 Maximum Reach at Ground Line	10 120 mm	33'2"	9700 mm	31'10"	10 120 mm	33'2"
3 Maximum Cutting Height	9640 mm	31'8"	9450 mm	31'0"	9640 mm	31'8"
4 Maximum Loading Height	6620 mm	21'9"	6420 mm	21'1"	6620 mm	21'9"
5 Minimum Loading Height	2390 mm	7'10"	2850 mm	9'4"	2390 mm	7'10"
6 Maximum Depth Cut for 2240 mm (8'0") Level Bottom	6640 mm	21'9"	6170 mm	20'3"	6640 mm	21'9"
7 Maximum Vertical Wall Digging Depth	5110 mm	16'9"	4690 mm	15'5"	5110 mm	16'9"
Bucket Digging Force (ISO)	166 kN	37,320 lbf	166 kN	37,320 lbf	166 kN	37,320 lbf
Stick Digging Force (ISO)	121 kN	27,200 lbf	141 kN	31,700 lbf	121 kN	27,200 lbf
Bucket Type	GDX		GDX		GDX	
Bucket Capacity	1.20 m^3	1.57 yd^3	1.20 m^3	1.57 yd^3	1.20 m^3	1.57 yd^3
Bucket Tip Radius	1660 mm	5'5"	1660 mm	5'5"	1660 mm	5'5"

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

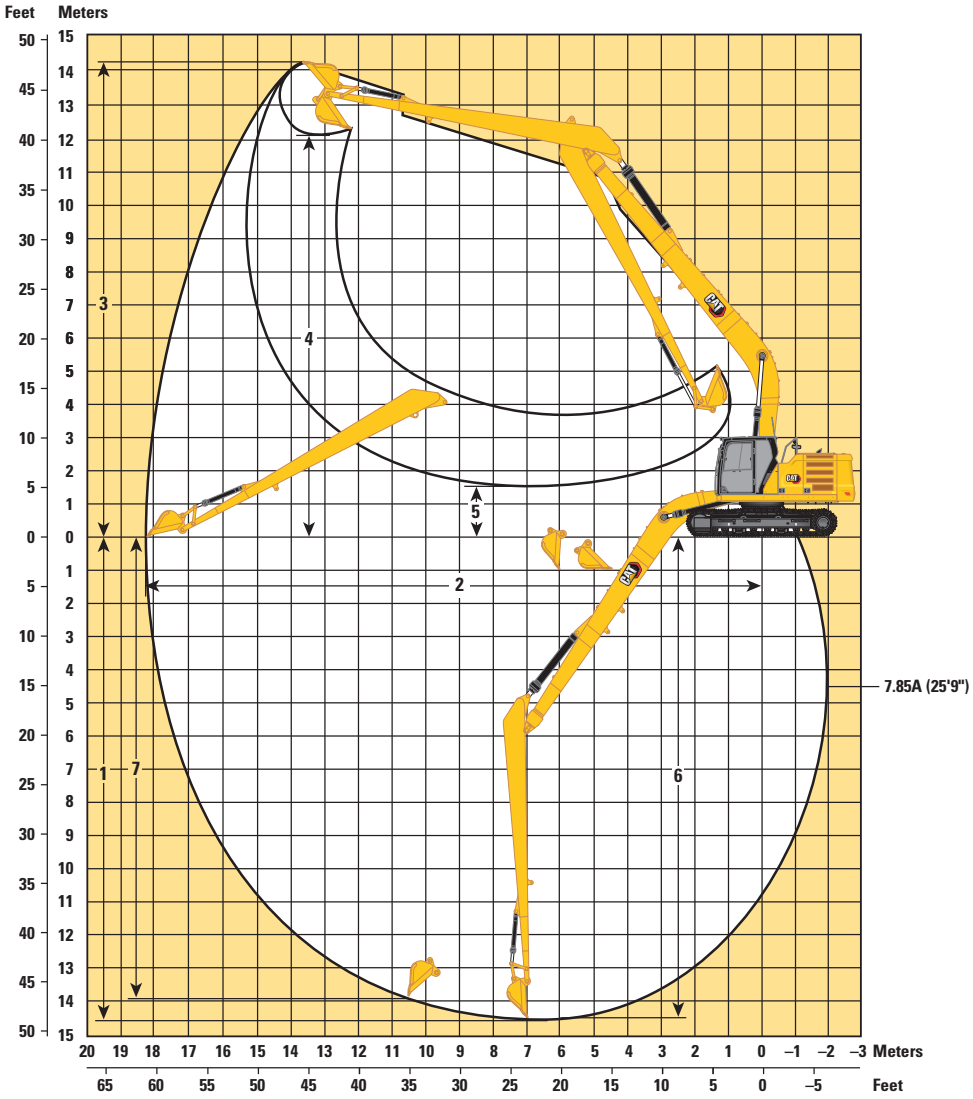

Boom Options	Super Long Reach Boom 10.2 m (33'6")	
Stick Options	**Super Long Reach Stick 7.85A (25'9")**	
1 Maximum Digging Depth	14 580 mm	47'10"
2 Maximum Reach at Ground Line	18 280 mm	60'0"
3 Maximum Cutting Height	14 210 mm	46'7"
4 Maximum Loading Height	12 150 mm	39'10"
5 Minimum Loading Height	1500 mm	4'11"
6 Maximum Depth Cut for 2240 mm (8'0") Level Bottom	14 480 mm	47'6"
7 Maximum Vertical Wall Digging Depth	13 980 mm	45'10"
Bucket Digging Force (ISO)	61 kN	13,710 lbf
Stick Digging Force (ISO)	45 kN	10,120 lbf
Bucket Type	Ditch Cleaning	
Bucket Capacity	0.57 m^3	0.75 yd^3
Bucket Tip Radius	1070 mm	3'6"

Bucket Specifications and Compatibility

								Undercarriage	Long			Long
								Counterweight	4.6 m (10,140 lb)			6.7 m ton (14,770 lb)
		Width		Capacity		Weight		Fill	Reach		Reach HD	SLR
	Linkage	mm	in	m^3	yd^3	kg	lb	%	R2.95 (9'8")	R2.5 (8'2")	R2.95 HD (9'8")	SLR
Pin-On (No Quick Coupler)												
General Duty Excavation	CB	1200	47	1.03	1.35	946	2,085	100	●	●	●	
	CB	1300	51	1.10	1.44	983	2,167	100	●	●	●	
	CB	1350	53	1.20	1.57	1034	2,280	100	●	●	●	
	CB	1650	65	1.50	1.96	1157	2,552	100	◉	●	◉	
Heavy Duty Excavation	CB	1200	47	1.03	1.35	946	2,085	100	●	●	●	
	CB	1300	51	1.10	1.44	1098	2,420	100	●	●	●	
	CB	1450	57	1.30	1.70	1198	2,642	90	●	●	●	
General Duty Excavation	A	900	36	0.53	0.69	411	905	100				◇
Ditch Cleaning	A	1200	48	0.57	0.74	364	803	100				◇
								kg	3990	4334	3723	955
Maximum load with pin-on (payload + bucket)								lb	8,796	9,555	8,208	2,105
With Cat Pin Grabber Coupler												
General Duty Excavation	CB	1300	51	1.10	1.44	983	2,167	100	●	●	●	
	CB	1350	53	1.20	1.57	1034	2,280	100	●	●	◉	
	CB	1650	65	1.50	1.96	1157	2,552	100	⊖	◉	○	
Heavy Duty Excavation	CB	1200	47	1.03	1.35	946	2,085	100	●	●	●	
	CB	1300	51	1.10	1.44	1098	2,420	100	●	●	◉	
	CB	1450	57	1.30	1.70	1198	2,642	90	◉	●	⊖	
								kg	3464	3808	3197	429
Maximum load with coupler (payload + bucket)								lb	7,636	8,395	7,048	945

Maximum Material Density:

- ● 2100 kg/m^3 (3,500 lb/yd^3)
- ◉ 1800 kg/m^3 (3,000 lb/yd^3)
- ⊖ 1500 kg/m^3 (2,500 lb/yd^3)
- ○ 1200 kg/m^3 (2,000 lb/yd^3)
- ◇ 900 kg/m^3 (1,500 lb/yd^3)

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

Attachments Offering Guide

Not all attachments available in all regions. Consult your Cat dealer for specific configurations available in your region.

PIN-ON ATTACHMENTS

Undercarriage			**Long**	
Counterweight			**4.6 mt (10,140 lb)**	
Boom Type		**Reach**	**Reach**	**Reach HD**
Stick Length		**2.5 m (8'2")**	**2.95 m (9'8")**	**2.95 m HD (9'8")**
Hydraulic Hammers	H120 GC Side-mount	✓	✓	✓
	H120E S	✓	✓	✓
	H130E S	✓	✓	✓
	H140E S	✓	✓	✓
Pulverizers	P215	✓	✓	✓
	P225	✓	✓	✓
Cat Pin Grabber Couplers		✓	✓	✓

CAT PIN GRABBER COUPLERS ATTACHMENTS

Undercarriage			**Long**	
Counterweight			**4.6 mt (10,140 lb)**	
Boom Type		**Reach**	**Reach**	**Reach HD**
Stick Length		**2.5 m (8'2")**	**2.95 m (9'8")**	**2.95 m HD (9'8")**
Hydraulic Hammers	H120 GC Side-mount	✓	✓	✓
	H120E S	✓	✓	✓
	H130E S	✓	✓	✓
	H140E S	✓	✓	✓
Pulverizers	P215	✓	✓	✓
	P225	✓	✓	✓

BOOM-MOUNT ATTACHMENTS

Undercarriage		**Long**	
Counterweight		**4.6 mt (10,140 lb)**	
Boom Type		**Reach**	**Reach HD**
Mobile Scrap and Demolition Shears	S3050	✓	✓

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
CAT TECHNOLOGY		
Cat Product Link™	✓	
Cat GRADE with 2D	✓	
Cat GRADE with Advanced 2D		✓
Cat GRADE with 3D		✓
2D E-Fence (Body Avoidance/E-Ceiling/ Floor/Reach/Swing)	✓	
Cat GRADE with Assist: – Boom Assist – Bucket Assist – Swing Assist – Grade Assist – Lift Assist	✓	
Cat PAYLOAD: – Static weigh – Auto calibration – Payload information	✓	
Remote Troubleshooting		✓
Remote Flash		✓
ENGINE		
Three selectable modes: Power, Smart, Eco	✓	
One-touch low idle with automatic engine speed control	✓	
Auto engine idle shutdown	✓	
4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓	
52° C (125° F) high-ambient cooling capacity with derate	✓	
–18° C (0° F) cold start capability	✓	
Sealed double element air filter with integrated precleaner	✓	
2 × 115 amp. dual alternator	✓	
Electric fuel priming pump	✓	
Reversible electric cooling fans	✓	
Two-stage fuel filtration system with water separator and indicator	✓	
Biodiesel capable (up to B20)	✓	

	Standard	Optional
HYDRAULIC SYSTEM		
Electronic main control valve	✓	
Boom and stick regeneration circuits	✓	
Automatic hydraulic oil warm up	✓	
Automatic two- speed travel	✓	
Boom and stick drift reduction valve	✓	
Boom and stick lowering check valves		✓
Hammer return filter circuit		✓
Combined Tool Control (two pump, one/two way high-pressure flow)		✓
Medium-pressure circuit		✓
Quick coupler circuit		✓
Tandem type electronic main pump	✓	
Element type main hydraulic filter	✓	
UNDERCARRIAGE AND STRUCTURES		
Track guiding guard, segmented two pieces	✓	
Bottom guard	✓	
Grease lubricated track	✓	
Swing drive and motor, and swing bearing for higher swing torque	✓	
4.6 mt (10,140 lb) counterweight	✓	
6.7 mt (14,770 lb) counterweight		✓
600 mm (24") triple grouser track shoes	✓	
700 mm (28") triple grouser track shoes		✓
790 mm (31") triple grouser track shoes		✓
600 mm (24") double grouser track shoes		✓
Tie-down points on base frame (ISO 15818 Compliant)	✓	

(continued on next page)

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional
BOOMS, STICKS AND LINKAGES		
Boom cylinders		✓
5.9 m (19'4") Reach boom	✓	
5.9 m (19'4") HD Reach boom		✓
10.2 m (33'6") Super Long Reach boom		✓
2.95 m (9'8") Reach stick, CB1 linkage	✓	
2.95 m (9'8") HD Reach stick, CB1 linkage		✓
2.5 m (8'2") Reach stick, CB1 linkage		✓
7.85 m (25'9") Super Long Reach stick, A linkage		✓
Bucket linkage, CB1 family without lifting eye Cat GRADE	✓	
Bucket linkage, A family without lifting eye, Super Long Reach, Cat GRADE		✓
Bucket linkage, A family without lifting eye, Super Long Reach		✓
ELECTRICAL SYSTEM		
Two 1,000 CCA maintenance free batteries	✓	
Programmable time-delay LED working lights	✓	
LED chassis light, left-hand/right-hand boom lights, cab lights – 850 lumens	✓	
360° lighting		✓
Centralized electrical disconnect switch	✓	
After engine shutdown 90 seconds programmable time delay LED working lights: One chassis mounted, one left-hand boom mounted	✓	

	Standard	Optional
SERVICE AND MAINTENANCE		
Sampling ports for Scheduled Oil Sampling (S·O·S℠)	✓	
Ground-level and platform-level engine oil dipsticks	✓	
Electric refueling pump with auto shut off		✓
SAFETY AND SECURITY		
Bluetooth® receiver	✓	
Rearview camera and right-hand side mirror	✓	
Right-side-view camera	✓	
360° visibility*		✓
Ground-level engine shutoff switch	✓	
Right-hand handrail and hand hold	✓	
Signaling/warning horn	✓	

*Optional on machines equipped with a Super Long Reach boom.

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Right-hand electrical pedal (two-way) for tool control
- Radial lower wiper windshield (for comfort and deluxe cab only)
- Dual exit rear window kit (Canadian regulation)
- Rain protector plus cab light cover
- Polycarbonate roof hatch (for comfort cab only)
- Front windshield laminated glass (P5A glass, EU demolition regulation)

SAFETY AND SECURITY

- Seat belt, retractable, 76 mm (3") width

GUARDS

- HD swivel guard (16 mm/0.63" thick)
- Side rubber bumper guard
- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front

ELECTRICAL

- Jump start wiring

326 Cab Options

Cab Options

	Comfort	Deluxe	Premium
ROPS, standard sound suppression	●	●	
ROPS, advanced sound suppression			●
High-resolution 203 mm (8") LCD touch screen monitor	●	○	
High-resolution 254 mm (10") LCD touch screen monitor		○	●
Automatic bi-level air conditioner	●	●	●
Jog dial and shortcut keys for monitor control	●	●	●
Keyless push-to-start engine control	●	●	●
Height-adjustable console, three steps with tool	●		
Height-adjustable infinite, with no tool		●	●
Fixed left-side console	●		
Tilt-up left-side console		●	●
Mechanically adjustable seat suspension	●		
Heated seat with air-adjustable suspension		●	
Heated and cooled seat with automatic adjustable suspension			●
51 mm (2") orange seat belt	●	●	●
Bluetooth® integrated radio (including USB, aux port and microphone)	●	●	●
12V DC outlets	●	●	●
Document storage	●	●	●
Rear head storage net and lunchbox storage net		●	●
Cup and bottle holders	●	●	●
One-piece windshield (with fixed glass skylight)			○
Openable two-piece front window	●	●	○
Upper radial wiper with washer	●	●	
Parallel wiper with washer			●
Openable steel hatch	●		
Openable polycarbonate skylight hatch		●	○
Fixed glass skylight (with one piece windshield)			○
LED dome light	●	●	●
Floor welcome light		●	●
Roller front sunscreen	●	●	●
Roller rear sunscreen	○	○	●
Rear window emergency exit	●	●	●
Washable floor mat	●	●	●
Beacon ready	●	●	●

● Standard

○ Optional

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at **www.cat.com**

AEXQ2564 (10-2019)
Build Number: 07A
(Japan)

© 2018 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Based on the Labor, Safety and Health Laws in Japan, employer of small construction equipment are required to provide specific training for all operators on machines with ship weight less than 3 metric ton. For machines greater than 3 metric ton, operator needs to obtain operator license certification from a Government approved registered training school.

CAT®