



326

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacity	2
Standards	2
Sound Performance	2
Operating Weights and Ground Pressures	3
Major Component Weights	3
Dimensions	4
Working Ranges and Forces	5
Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb)	6
SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb)	12
Bucket Specifications and Compatibility	18
Attachments Offering Guide	20
Standard and Optional Equipment	21
Dealer Installed Kits and Attachments	22
Cab Options	23

326 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C7.1	
Engine Power – ISO 9249	150 kW	201 hp
Engine Power – ISO 14396	151 kW	202 hp
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.01 L	428 in ³

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Rating at 2,200 rpm.

Swing Mechanism

Swing Speed	10.5 rpm	
Maximum Swing Torque	106 kN·m	78,180 lbf·ft

Weights

Operating Weight	26 500 kg	58,300 lb
• Long undercarriage, Reach boom, R2.95 m (9'7") stick, HD 1.54 m³ (2.01 yd³) bucket, 790 mm (31") triple grouser shoes and 4.6 mt (10,140 lb) counterweight.		
Operating Weight	29 200 kg	64,300 lb
• Long undercarriage, Super Long Reach boom, 7.85A (25'9") stick, 0.57 m³ (0.75 yd³) Ditch Cleaning bucket, 790 mm (31") triple grouser shoes and 6.7 mt (14,770 lb) counterweight.		

Track

Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	790 mm	31 in
Number of Shoes (each side)	51	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	226 kN	50,807 lbf

Hydraulic System

Main System – Maximum Flow – Implement	515 L/min	136 gal/min
Maximum Pressure – Equipment – Implement	35 000 kPa	5,075 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,510 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	28 400 kPa	4,118 psi
Boom Cylinder – Bore	135 mm	5 in
Boom Cylinder – Stroke	1305 mm	51 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1660 mm	65 in
Bucket Cylinder – Bore	130 mm	5 in
Bucket Cylinder – Stroke	1156 mm	46 in

Service Refill Capacity

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	10 L	2.6 gal
Final Drive (each)	5.5 L	1.5 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank (including suction pipe)	147 L	38.8 gal
DEF Tank	41 L	10.8 gal

Standards

Brakes	ISO 10265: 2008
Cab/FOGS	ISO 10262: 1998
Cab/ROPS	ISO 12117-2: 2008

Sound Performance

ISO 6395 (external)	103 dB(A)
ISO 6396 (inside cab)	70 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

326 Hydraulic Excavator Specifications

Operating Weights and Ground Pressures

	600 mm (24") Single Grouser Shoes		700 mm (28") Triple Grouser Shoes		790 mm (31") Triple Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Frame with Track Rollers and Carrier Rollers						
4.6 mt (10,140 lb) Counterweight + Long Undercarriage Base Machine						
Reach Boom + 2.95 m (9'8") Stick + 1.54 m ³ (2.01 yd ³) HD Bucket	25 700 (56,700)	51 (7.4)	26 100 (57,600)	45 (6.5)	26 500 (58,300)	40 (5.8)
Reach Boom + 3.6 m (11'10") Stick + 1.54 m ³ (2.01 yd ³) HD Bucket	25 900 (57,100)	52 (7.5)	26 300 (58,000)	45 (6.5)	26 600 (58,700)	40 (5.8)
6.7 mt (14,770 lb) Counterweight + Long Undercarriage Base Machine						
Super Long Reach Boom + Super Long Reach 9.85 m (25'9") Stick + 0.57 m ³ (0.75 yd ³) Ditch Cleaning Bucket	28 400 (62,700)	57 (8.2)	28 900 (63,600)	49 (7.2)	29 200 (64,300)	44 (6.4)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

Major Component Weights


	kg	lb
Base Machine Weight: including upperframe, undercarriage, counterweight, boom cylinders, without boom, stick, bucket, stick cylinder, bucket cylinder, tracks without fuel, operator		
With 4.6 mt (10,140 lb) Counterweight	17 400	38,360
With 6.7 mt (14,770 lb) Counterweight	19 500	42,990
Track Shoes:		
600 mm (24") Width, 14 mm (0.55") Thick Single Grouser Track Shoes	3260	7,190
700 mm (28") Width, 12.5 mm (0.49") Thick, Triple Grouser Track Shoes	3670	8,090
790 mm (31") Width, 12.5 mm (0.49") Thick Triple Grouser Track Shoes with Step Extension for ISO 2867	4000	8,820
Two Boom Cylinders	460	1,010
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	460	1,010
Counterweights:		
4.6 mt (10,140 lb) Counterweight	4600	10,140
6.7 mt (14,770 lb) Counterweight	6700	14,770
Undercarriage (without track shoes):		
Long Undercarriage	5500	12,130
Booms (including lines, pins, stick cylinder):		
Reach Boom 5.9 m (19'4")	2050	4,520
Super Long Reach Boom 10.2 m (33'6")	3190	7,030
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R2.95CB (9'8")	1300	2,870
Reach Stick R3.6CB (11'10")	1490	3,280
Super Long Reach Stick 7.85A (25'9")	1600	3,530
Buckets (without linkage, with tips and side cutters):		
1.54 m ³ (2.01 yd ³) HD CB Linkage	1200	2,650
0.57 m ³ (0.75 yd ³) DC A Linkage	390	860
Quick Couplers:		
Pin Grabber QC CB with Pins	530	1,170
Pin Grabber QC CB without Pins	500	1,100

Refer to page 18 for a complete list of bucket options.

326 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

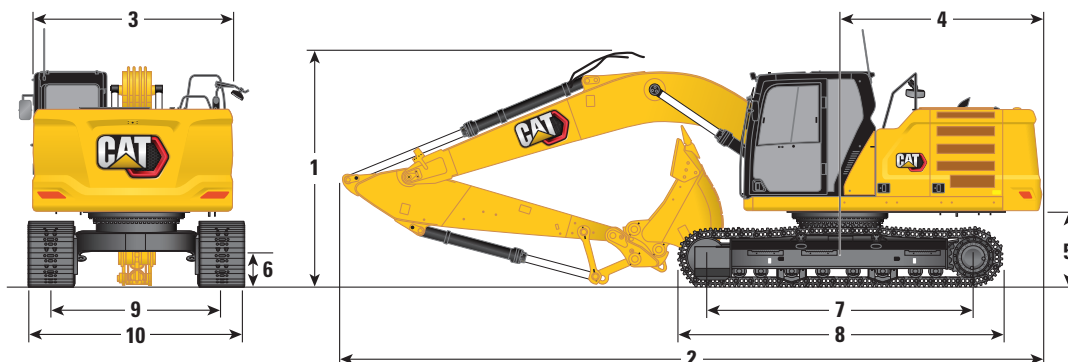

Boom Options

Reach Boom 5.9 m (19'4")

Super Long Reach Boom 10.2 m (33'6")

Stick Options

Reach Stick

Super Long Reach Stick

R2.95CB (9'8")

R3.6CB (11'10")

7.85A (25'9")

1 Machine Height:

Cab Height	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
FOGS Height	3140 mm	10'4"	3140 mm	10'4"	3140 mm	10'4"
Guardrails/Handrails Height	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
With Boom/Stick/Bucket Installed	3250 mm	10'8"	3520 mm	11'7"	3160 mm	10'4"
With Boom/Stick Installed	3120 mm	10'3"	3310 mm	10'10"	3160 mm	10'4"
With Boom Installed	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"

2 Machine Length:

With Boom/Stick/Bucket Installed	10 060 mm	33'0"	10 060 mm	33'1"	14 350 mm	47'1"
With Boom/Stick Installed	10 040 mm	32'11"	10 060 mm	33'1"	14 350 mm	47'1"
With Boom Installed	8720 mm	28'7"	8720 mm	28'7"	13 250 mm	43'6"

3 Upperframe Width without Walkways

	2940 mm	9'8"	2940 mm	9'8"	2940 mm	9'8"
--	---------	------	---------	------	---------	------

4 Tail Swing Radius

	3000 mm	9'10"	3000 mm	9'10"	3000 mm	9'10"
--	---------	-------	---------	-------	---------	-------

5 Counterweight Clearance without Shoe Lug

	1060 mm	3'6"	1060 mm	3'6"	1060 mm	3'6"
--	---------	------	---------	------	---------	------

6 Ground Clearance without Shoe Lug

	440 mm	1'5"	440 mm	1'5"	440 mm	1'5"
--	--------	------	--------	------	--------	------

7 Length to Center of Rollers

	3830 mm	12'7"	3830 mm	12'7"	3830 mm	12'7"
--	---------	-------	---------	-------	---------	-------

8 Track Length with Triple Grouser Shoes

	4640 mm	15'3"	4640 mm	15'3"	4640 mm	15'3"
--	---------	-------	---------	-------	---------	-------

9 Track Gauge

	2590 mm	8'6"	2590 mm	8'6"	2590 mm	8'6"
--	---------	------	---------	------	---------	------

10 Track Width:

600 mm (24") Shoes	600 mm	2'0"	600 mm	2'0"	600 mm	2'0"
700 mm (28") Shoes	700 mm	2'4"	700 mm	2'4"	700 mm	2'4"
790 mm (31") Shoes	790 mm	2'7"	790 mm	2'7"	790 mm	2'7"

Undercarriage Width (with steps/without steps):

600 mm (24") Shoes (long undercarriage)	3190 mm	10'6"	3190 mm	10'6"	3190 mm	10'6"
700 mm (28") Shoes (long undercarriage)	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"
790 mm (31") Shoes (long undercarriage)	3380 mm	11'1"	3380 mm	11'1"	3380 mm	11'1"

Bucket Type

HD

HD



Ditch Cleaning

Bucket Capacity	1.54 m ³	2.01 yd ³	1.54 m ³	2.01 yd ³	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1660 mm	5'5"	1660 mm	5'5"	1070 mm	3'6"

326 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

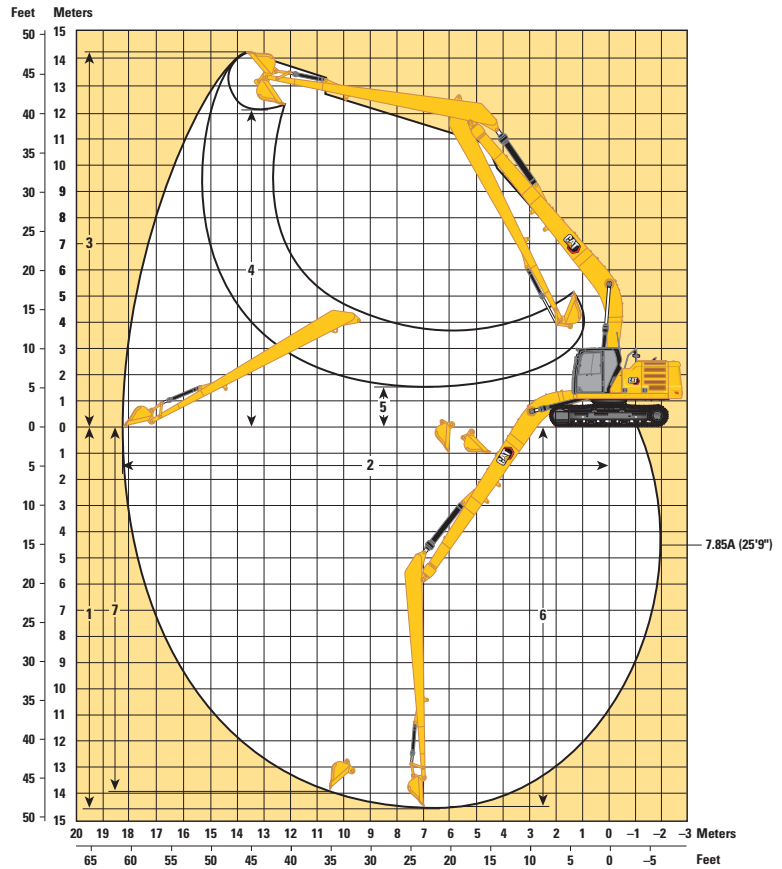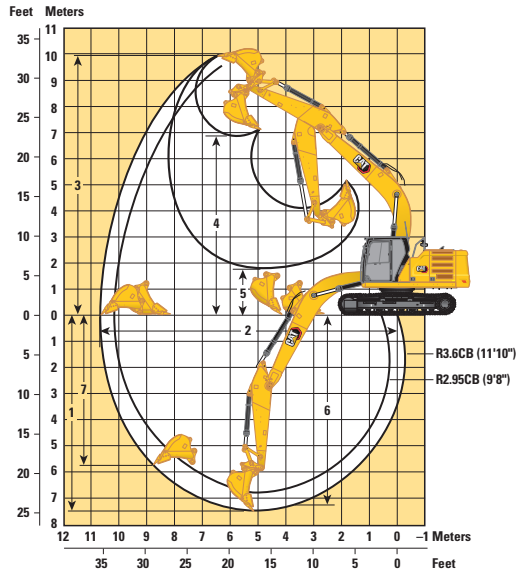

Boom Options

Reach Boom 5.9 m (19'4")

Super Long Reach Boom 10.2 m (33'6")

Stick Options

Reach Stick

Super Long Reach Stick 7.85A (25'9")



R2.95CB (9'8")


R3.6CB (11'10")

	6820 mm	22'5"	7470 mm	24'6"	14 580 mm	47'10"
1 Maximum Digging Depth	6820 mm	22'5"	7470 mm	24'6"	14 580 mm	47'10"
2 Maximum Reach at Ground Line	10 120 mm	33'2"	10 720 mm	35'2"	18 280 mm	60'0"
3 Maximum Cutting Height	9640 mm	31'8"	9930 mm	32'7"	14 210 mm	46'7"
4 Maximum Loading Height	6620 mm	21'9"	6900 mm	22'8"	12 150 mm	39'10"
5 Minimum Loading Height	2390 mm	7'10"	1740 mm	5'9"	1500 mm	4'11"
6 Maximum Depth Cut for 2240 mm (8'0") Level Bottom	6640 mm	21'9"	7320 mm	24'0"	14 480 mm	47'6"
7 Maximum Vertical Wall Digging Depth	5110 mm	16'9"	5720 mm	18'9"	13 980 mm	45'10"
Bucket Digging Force (ISO)	166 kN	37,320 lbf	166 kN	37,320 lbf	61 kN	13,710 lbf
Stick Digging Force (ISO)	121 kN	27,200 lbf	105 kN	23,600 lbf	45 kN	10,120 lbf
Bucket Type	HD		HD		Ditch Cleaning	
Bucket Capacity	1.54 m ³	2.01 yd ³	1.54 m ³	2.01 yd ³	0.57 m ³	0.75 yd ³
Bucket Tip Radius	1660 mm	5'5"	1660 mm	5'5"	1070 mm	3'6"




326 Hydraulic Excavator Specifications


Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
																
7500 mm 300 in	kg lb													*4200 *9,350	*4200 *9,350	7210 280
6000 mm 240 in	kg lb									*5450 *11,500	5050 10,800			*4050 *8,850	*4050 *8,850	8190 320
4500 mm 180 in	kg lb							*6500 *14,150	*6500 *14,150	*6100 *13,300	4950 10,600			*4000 *8,850	3800 8,350	8810 350
3000 mm 120 in	kg lb			*15 100 *32,100	*15 100 *32,100	*9700 *20,900	*9700 *20,900	*7700 *16,650	6700 14,400	*6650 *14,500	4800 10,250	*4750 3600		*4150 *9,100	3500 7,700	9140 360
1500 mm 60 in	kg lb					*12 100 *26,100	9650 20,750	*8900 *19,250	6350 13,650	7000 15,000	4600 9,900	5300 *10,500	3500 7,500	*4450 *9,700	3400 7,450	9210 370
0 mm 0 in	kg lb			*6450 *14,750	*6450 *14,750	*13 550 *29,350	9200 19,750	9550 20,500	6100 13,100	6800 14,650	4450 9,550	*5100 3450		*4900 *10,800	3400 7,500	9030 360
-1500 mm -60 in	kg lb	*5900 *13,200	*5900 *13,200	*9750 *22,150	*9750 *22,150	*13 950 *30,250	9000 19,350	9400 20,150	5950 12,800	6750 14,450	4350 9,400			5550 12,250	3650 8,000	8590 340
-3000 mm -120 in	kg lb	*9850 *22,050	*9850 *22,050	*14 550 *33,050	*14 550 *33,050	*13 400 *29,000	9000 19,350	9350 20,100	5900 12,750	6750 14,500	4400 9,450			6350 14,050	4150 9,150	7830 310
-4500 mm -180 in	kg lb			*16 500 *35,500	*16 500 *35,500	*11 750 *25,200	9150 19,750	*8650 *18,400	6050 13,050					*7450 *16,350	5250 11,800	6650 260

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
																
7500 mm 300 in	kg lb													*4600 *10,250	*4600 *10,250	7210 280
6000 mm 240 in	kg lb									*6000 *12,600	5050 10,800			*4400 *9,750	4350 9,650	8190 320
4500 mm 180 in	kg lb							*7200 *15,650	7050 15,150	*6750 *14,700	4950 10,600			*4400 *9,700	3800 8,350	8810 350
3000 mm 120 in	kg lb			*16 600 *35,300	*16 600 *35,300	*10 700 *23,050	10 350 22,300	*8500 *18,350	6700 14,400	7200 15,450	4800 10,250	*5200 3600		*4550 *10,000	3500 7,700	9140 360
1500 mm 60 in	kg lb					*13 350 *28,750	9650 20,750	*9850 21,150	6350 13,650	7000 15,000	4600 9,900	5300 11,400	3500 7,500	*4850 *10,650	3400 7,450	9210 370
0 mm 0 in	kg lb			*7050 *16,100	*7050 *16,100	*14 950 *32,350	9200 19,750	9550 20,500	6100 13,100	6800 14,650	4450 9,550	5250 3450		5200 11,450	3400 7,500	9030 360
-1500 mm -60 in	kg lb	*6450 *14,450	*6450 *14,450	*10 650 *24,150	*10 650 *24,150	15 050 32,250	9000 19,350	9400 20,150	5950 12,800	6750 14,450	4350 9,400			5550 12,250	3650 8,000	8590 340
-3000 mm -120 in	kg lb	*10 700 *24,000	*10 700 *24,000	*15 850 *35,950	*15 850 *35,950	*14 800 *32,050	9000 19,350	9350 20,100	5900 12,750	6750 14,500	4400 9,450			6350 14,050	4150 9,150	7830 310
-4500 mm -180 in	kg lb			*18 250 *39,250	*18 250 *39,200	*12 950 *27,850	9150 19,750	9500 *20,350	6050 13,050					8150 *18,150	5250 11,800	6650 260



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



326 Hydraulic Excavator Specifications


Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
																
7500 mm 300 in	kg lb													*4200 *9,350	*4200 *9,350	7210 280
6000 mm 240 in	kg lb									*5450 *11,500	5000 10,700			*4050 *8,850	*4050 *8,850	8190 320
4500 mm 180 in	kg lb							*6500 *14,150	*6500 *14,150	*6100 *13,300	4900 10,500			*4000 *8,850	*4000 *8,250	8810 350
3000 mm 120 in	kg lb			*15 100 *32,100	*15 100 *32,100	*9700 *20,900	*9700 *20,900	*7700 *16,650	6600 14,250	*6650 *14,500	4700 10,150	*4750 3550		*4150 *9,100	3450 7,600	9140 360
1500 mm 60 in	kg lb					*12 100 *26,100	9550 20,500	*8900 *19,250	6300 13,500	6900 14,850	4550 9,750	5250 *10,500	3450 7,400	*4450 *9,700	3350 7,350	9210 370
0 mm 0 in	kg lb			*6450 *14,750	*6450 *14,750	*13 550 *29,350	9100 19,500	9450 20,250	6000 12,950	6750 14,500	4400 9,450	*5100 3400		*4900 *10,800	3400 7,400	9030 360
-1500 mm -60 in	kg lb	*5900 *13,200	*5900 *13,200	*9750 *22,150	*9750 *22,150	*13 950 *30,250	8900 19,100	9250 19,900	5850 12,600	6650 14,300	4300 9,250			5500 12,100	3600 7,900	8590 340
-3000 mm -120 in	kg lb	*9850 *22,050	*9850 *22,050	*14 550 *33,050	*14 550 *33,050	*13 400 *29,000	8900 19,150	9250 19,850	5850 12,600	6650 14,350	4300 9,300			6300 13,900	4100 9,050	7830 310
-4500 mm -180 in	kg lb			*16 500 *35,500	*16 500 *35,500	*11 750 *25,200	9050 19,500	*8650 *18,400	5950 12,850					*7450 *16,350	5200 11,650	6650 260

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
																
7500 mm 300 in	kg lb													*4600 *10,250	*4600 *10,250	7210 280
6000 mm 240 in	kg lb									*6000 *12,600	5000 10,700			*4400 *9,750	4300 9,550	8190 320
4500 mm 180 in	kg lb							*7200 *15,650	6950 14,950	*6750 *14,700	4900 10,500			*4400 *9,700	3750 8,250	8810 350
3000 mm 120 in	kg lb			*16 600 *35,300	*16 600 *35,300	*10 700 *23,050	10 250 22,100	*8500 *18,350	6600 14,250	7100 15,250	4700 10,150	*5200 3550		*4550 *10,000	3450 7,600	9140 360
1500 mm 60 in	kg lb					*13 350 *28,750	9550 20,500	9750 20,900	6300 13,500	6900 14,850	4550 9,750	5250 11,250	3450 7,400	*4850 *10,650	3350 7,350	9210 370
0 mm 0 in	kg lb			*7050 *16,100	*7050 *16,100	*14 950 *32,350	9100 19,500	9450 20,250	6000 12,950	6750 14,500	4400 9,450	5150 3400		5150 11,300	3400 7,400	9030 360
-1500 mm -60 in	kg lb	*6450 *14,450	*6450 *14,450	*10 650 *24,150	*10 650 *24,150	14 900 31,900	8900 19,100	9250 19,900	5850 12,600	6650 14,300	4300 9,250			5500 12,100	3600 7,900	8590 340
-3000 mm -120 in	kg lb	*10 700 *24,000	*10 700 *24,000	*15 850 *35,950	*15 850 *35,950	*14 800 31,900	8900 19,150	9250 19,850	5850 12,600	6650 14,350	4300 9,300			6300 13,900	4100 9,050	7830 310
-4500 mm -180 in	kg lb			*18 250 *39,250	18 150 38,800	*12 950 *27,850	9050 19,500	9400 20,200	5950 12,850					8050 18,050	5200 11,650	6650 260



ISO 10567





* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.


Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




326 Hydraulic Excavator Specifications


Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: Off



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
																
7500 mm 300 in	kg lb													*4200 *9,350	*4200 *9,350	7210 280
6000 mm 240 in	kg lb									*5450 *11,500	5050 10,800			*4050 *8,850	*4050 *8,850	8190 320
4500 mm 180 in	kg lb							*6500 *14,150	*6500 *14,150	*6100 *13,300	4950 10,600			*4000 *8,850	3800 8,350	8810 350
3000 mm 120 in	kg lb			*15 100 *32,100	*15 100 *32,100	*9700 *20,900	*9700 *20,900	*7700 *16,650	6700 14,400	*6650 *14,500	4800 10,250	*4750 3600		*4150 *9,100	3500 7,700	9140 360
1500 mm 60 in	kg lb					*12 100 *26,100	9650 20,750	*8900 *19,250	6350 13,650	7000 15,000	4600 9,900	5300 *10,500	3500 7,500	*4450 *9,700	3400 7,450	9210 370
0 mm 0 in	kg lb			*6450 *14,750	*6450 *14,750	*13 550 *29,350	9200 19,750	9550 20,500	6100 13,100	6800 14,650	4450 9,550	*5100 3450		*4900 *10,800	3400 7,500	9030 360
-1500 mm -60 in	kg lb	*5900 *13,200	*5900 *13,200	*9750 *22,150	*9750 *22,150	*13 950 *30,250	9000 19,350	9400 20,150	5950 12,800	6750 14,450	4350 9,400			5550 12,250	3650 8,000	8590 340
-3000 mm -120 in	kg lb	*9850 *22,050	*9850 *22,050	*14 550 *33,050	*14 550 *33,050	*13 400 *29,000	9000 19,350	9350 20,100	5900 12,750	6750 14,500	4400 9,450			6350 14,050	4150 9,150	7830 310
-4500 mm -180 in	kg lb			*16 500 *35,500	*16 500 *35,500	*11 750 *25,200	9150 19,750	*8650 *18,400	6050 13,050					*7450 *16,350	5250 11,800	6650 260

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
																
7500 mm 300 in	kg lb													*4600 *10,250	*4600 *10,250	7210 280
6000 mm 240 in	kg lb									*6000 *12,600	5050 10,800			*4400 *9,750	4350 9,650	8190 320
4500 mm 180 in	kg lb							*7200 *15,650	7050 15,150	*6750 *14,700	4950 10,600			*4400 *9,700	3800 8,350	8810 350
3000 mm 120 in	kg lb			*16 600 *35,300	*16 600 *35,300	*10 700 *23,050	10 350 22,300	*8500 *18,350	6700 14,400	7200 15,450	4800 10,250	*5200 3600		*4550 *10,000	3500 7,700	9140 360
1500 mm 60 in	kg lb					*13 350 *28,750	9650 20,750	*9850 21,150	6350 13,650	7000 15,000	4600 9,900	5300 11,400	3500 7,500	*4850 *10,650	3400 7,450	9210 370
0 mm 0 in	kg lb			*7050 *16,100	*7050 *16,100	*14 950 *32,350	9200 19,750	9550 20,500	6100 13,100	6800 14,650	4450 9,550	5250 3450		5200 11,450	3400 7,500	9030 360
-1500 mm -60 in	kg lb	*6450 *14,450	*6450 *14,450	*10 650 *24,150	*10 650 *24,150	15 050 32,250	9000 19,350	9400 20,150	5950 12,800	6750 14,450	4350 9,400			5550 12,250	3650 8,000	8590 340
-3000 mm -120 in	kg lb	*10 700 *24,000	*10 700 *24,000	*15 850 *35,950	*15 850 *35,950	*14 800 *32,050	9000 19,350	9350 20,100	5900 12,750	6750 14,500	4400 9,450			6350 14,050	4150 9,150	7830 310
-4500 mm -180 in	kg lb			*18 250 *39,250	*18 250 *39,200	*12 950 *27,850	9150 19,750	9500 *20,350	6050 13,050					8150 *18,150	5250 11,800	6650 260



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




326 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*6500 *13,400	*6500 *13,400			*5400 *11,950	*5400 *11,950	6430 250
6000 mm 240 in	kg lb					*6600 *14,400	*6600 *14,400	*5150	5000	*5100 *11,250	5000 11,100	7510 300
4500 mm 180 in	kg lb			*8600 *18,500	*8600 *18,500	*7350 *15,950	6950 15,000	*6750 *14,700	4950 10,600	*5100 *11,250	4300 9,500	8180 330
3000 mm 120 in	kg lb			*11 000 *23,650	10 200 21,950	*8450 *18,300	6650 14,350	7200 15,450	4800 10,300	*5300 *11,650	3950 8,700	8540 340
1500 mm 60 in	kg lb			*13 100 *28,300	9600 20,650	*9550 *20,650	6350 13,700	7050 15,100	4650 10,000	*5700 *12,500	3800 8,400	8610 340
0 mm 0 in	kg lb			*14 100 *30,500	9250 19,950	9600 20,650	6150 13,250	6900 14,850	4550 9,750	5850 12,900	3900 8,500	8420 340
-1500 mm -60 in	kg lb	*10 400 *23,650	*10 400 *23,650	*14 050 *30,400	9200 19,750	9500 20,450	6100 13,100	6850 14,750	4500 9,700	6350 13,950	4200 9,200	7940 320
-3000 mm -120 in	kg lb	*17 050 *38,850	*17 050 *38,850	*13 000 *28,150	9250 19,900	9550 20,550	6100 13,150			7450 16,550	4900 10,800	7120 280
-4500 mm -180 in	kg lb	*14 450 *31,000	*14 450 *31,000	*10 650 *22,700	9500 20,400					*7900 *17,400	6650 14,900	5790 230

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*7100 *14,650	*7100 *14,650			*5900 *13,050	*5900 *13,050	6430 250
6000 mm 240 in	kg lb					*7250 *15,850	7200 15,450	*5650	5000	*5600 *12,300	5000 11,100	7510 300
4500 mm 180 in	kg lb			*9450 *20,350	*9450 *20,350	*8100 *17,550	6950 15,000	7350 15,750	4950 10,600	*5600 *12,300	4300 9,500	8180 330
3000 mm 120 in	kg lb			*12 100 *26,050	10 200 21,950	*9300 *20,150	6650 14,350	7200 15,450	4800 10,300	*5800 *12,700	3950 8,700	8540 340
1500 mm 60 in	kg lb			*14 450 *31,150	9600 20,650	9850 21,150	6350 13,700	7050 15,100	4650 10,000	5750 12,600	3800 8,400	8610 340
0 mm 0 in	kg lb			15 350 32,900	9250 19,950	9600 20,650	6150 13,250	6900 14,850	4550 9,750	5850 12,900	3900 8,500	8420 340
-1500 mm -60 in	kg lb	*11 350 *25,750	*11 350 *25,750	15 250 32,700	9200 19,750	9500 20,450	6100 13,100	6850 14,750	4500 9,700	6350 13,950	4200 9,200	7940 320
-3000 mm -120 in	kg lb	*18 550 *42,250	18 450 39,450	*14 350 *31,050	9250 19,900	9550 20,550	6100 13,150			7450 16,550	4900 10,800	7120 280
-4500 mm -180 in	kg lb	*16 000 *34,300	*16 000 *34,300	*11 750 *25,100	9500 20,400					*8750 *19,250	6650 14,900	5790 230



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




326 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*6500 *13,400	*6500 *13,400			*5400 *11,950	*5400 *11,950	6430 250
6000 mm 240 in	kg lb					*6600 *14,400	*6600 *14,400	*5150	4950	*5100 *11,250	4950 11,000	7510 300
4500 mm 180 in	kg lb			*8600 *18,500	*8600 *18,500	*7350 *15,950	6900 14,850	*6750 *14,700	4900 10,500	*5100 *11,250	4250 9,400	8180 330
3000 mm 120 in	kg lb			*11 000 *23,650	10 100 21,700	*8450 *18,300	6600 14,200	7100 15,300	4750 10,200	*5300 *11,650	3900 8,600	8540 340
1500 mm 60 in	kg lb			*13 100 *28,300	9500 20,400	*9550 *20,650	6300 13,550	6950 14,950	4600 9,900	5650 12,450	3750 8,300	8610 340
0 mm 0 in	kg lb			*14 100 *30,500	9150 19,700	9500 20,400	6100 13,100	6800 14,700	4500 9,650	5800 12,700	3850 8,400	8420 340
-1500 mm -60 in	kg lb	*10 400 *23,650	*10 400 *23,650	*14 050 *30,400	9100 19,500	9400 20,200	6000 12,950	6800 14,600	4450 9,550	6250 13,800	4150 9,100	7940 320
-3000 mm -120 in	kg lb	*17 050 *38,850	*17 050 *38,850	*13 000 *28,150	9150 19,650	9450 20,300	6050 13,000			7350 16,350	4800 10,700	7120 280
-4500 mm -180 in	kg lb	*14 450 *31,000	*14 450 *31,000	*10 650 *22,700	9400 20,200					*7900 *17,400	6550 14,750	5790 230

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*7100 *14,650	*7100 *14,650			*5900 *13,050	*5900 *13,050	6430 250
6000 mm 240 in	kg lb					*7250 *15,850	7100 15,300	*5650	4950	*5600 *12,300	4950 11,000	7510 300
4500 mm 180 in	kg lb			*9450 *20,350	*9450 *20,350	*8100 *17,550	6900 14,850	7250 15,600	4900 10,500	*5600 *12,300	4250 9,400	8180 330
3000 mm 120 in	kg lb			*12 100 *26,050	10 100 21,700	*9300 *20,150	6600 14,200	7100 15,300	4750 10,200	*5800 *12,700	3900 8,600	8540 340
1500 mm 60 in	kg lb			*14 450 *31,150	9500 20,400	9750 20,900	6300 13,550	6950 14,950	4600 9,900	5650 12,450	3750 8,300	8610 340
0 mm 0 in	kg lb			15 200 32,550	9150 19,700	9500 20,400	6100 13,100	6800 14,700	4500 9,650	5800 12,700	3850 8,400	8420 340
-1500 mm -60 in	kg lb	*11 350 *25,750	*11 350 *25,750	15 100 32,300	9100 19,500	9400 20,200	6000 12,950	6800 14,600	4450 9,550	6250 13,800	4150 9,100	7940 320
-3000 mm -120 in	kg lb	*18 550 *42,250	18 250 39,000	*14 350 *31,050	9150 19,650	9450 20,300	6050 13,000			7350 16,350	4800 10,700	7120 280
-4500 mm -180 in	kg lb	*16 000 *34,300	*16 000 *34,300	*11 750 *25,100	9400 20,200					*8750 *19,250	6550 14,750	5790 230



ISO 10567






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




326 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: Off



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*6500 *13,400	*6500 *13,400			*5400 *11,950	*5400 *11,950	6430 250
6000 mm 240 in	kg lb					*6600 *14,400	*6600 *14,400	*5150	4900	*5100 *11,250	4850 10,850	7510 300
4500 mm 180 in	kg lb			*8600 *18,500	*8600 *18,500	*7350 *15,950	6800 14,650	*6750 *14,700	4800 10,350	*5100 *11,250	4200 9,250	8180 330
3000 mm 120 in	kg lb			*11 000 *23,650	9950 21,450	*8450 *18,300	6500 14,000	7000 15,050	4700 10,050	*5300 *11,650	3850 8,450	8540 340
1500 mm 60 in	kg lb			*13 100 *28,300	9350 20,100	*9550 20,600	6200 13,350	6850 14,700	4550 9,750	5550 12,250	3700 8,150	8610 340
0 mm 0 in	kg lb			*14 100 *30,500	9050 19,400	9350 20,100	6000 12,900	6700 14,450	4400 9,500	5700 12,500	3750 8,300	8420 340
-1500 mm -60 in	kg lb	*10 400 *23,650	*10 400 *23,650	*14 050 *30,400	8950 19,200	9250 19,900	5900 12,750	6650 14,350	4350 9,400	6150 13,600	4050 8,950	7940 320
-3000 mm -120 in	kg lb	*17 050 *38,850	*17 050 *38,850	*13 000 *28,150	9000 19,350	9300 19,950	5950 12,800			7250 16,100	4750 10,500	7120 280
-4500 mm -180 in	kg lb	*14 450 *31,000	*14 450 *31,000	*10 650 *22,700	9250 19,900					*7900 *17,400	6450 14,500	5790 230

Reach Boom Lift Capacities – Counterweight: 4.6 mt (10,140 lb) – without Bucket, Heavy Lift: On



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb					*7100 *14,650	7100 *14,650			*5900 *13,050	*5900 *13,050	6430 250
6000 mm 240 in	kg lb					*7250 *15,850	7050 15,100	*5650	4900	*5600 *12,300	4850 10,850	7510 300
4500 mm 180 in	kg lb			*9450 *20,350	*9450 *20,350	*8100 *17,550	6800 14,650	7150 15,350	4800 10,350	*5600 *12,300	4200 9,250	8180 330
3000 mm 120 in	kg lb			*12 100 *26,050	9950 21,450	*9300 *20,150	6500 14,000	7000 15,050	4700 10,050	5750 12,650	3850 8,450	8540 340
1500 mm 60 in	kg lb			*14 450 *31,150	9350 20,100	9600 20,600	6200 13,350	6850 14,700	4550 9,750	5550 12,250	3700 8,150	8610 340
0 mm 0 in	kg lb			14 950 32,050	9050 19,400	9350 20,100	6000 12,900	6700 14,450	4400 9,500	5700 12,500	3750 8,300	8420 340
-1500 mm -60 in	kg lb	*11 350 *25,750	*11 350 *25,750	14 850 31,800	8950 19,200	9250 19,900	5900 12,750	6650 14,350	4350 9,400	6150 13,600	4050 8,950	7940 320
-3000 mm -120 in	kg lb	*18 550 *42,250	18 000 38,450	*14 350 *31,050	9000 19,350	9300 19,950	5950 12,800			7250 16,100	4750 10,500	7120 280
-4500 mm -180 in	kg lb	*16 000 *34,300	*16 000 *34,300	*11 750 *25,100	9250 19,900					*8750 *19,250	6450 14,500	5790 230



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

326 Hydraulic Excavator Specifications


SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off

7.85 m (25'9") 10.2 m (33'6")

SLR 7.85A



790 mm (31") Triple Grouser Shoes



2590 mm (8'6")

3830 mm (12'7")



4640 mm (15'3")

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
12 000 mm 480 in	kg lb													*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb													*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb													*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb													*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb													*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb													*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb			*4850	*4850							*3250 *7,000	*3250 *7,000	*1350 *2,950	*1350 *2,950	17 260 680
1500 mm 60 in	kg lb			*1600 *3,650	*1600 *3,650	*5500 *12,900	*5500 *12,900	*5750 *12,400	*5750 *12,400	*4450 *9,650	*4450 *9,650	*3700 *8,000	*3700 *8,000	*1400 *3,050	*1400 *3,050	17 300 680
0 mm 0 in	kg lb			*1650 *3,700	*1650 *3,700	*3650 *8,400	*3650 *8,400	*6700 *14,450	6050 13,050	*5100 *11,000	4600 9,850	*4150 *8,950	3600 7,750	*1450 *3,200	1300 2,800	17 200 680
-1500 mm -60 in	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3550 *8,000	*3550 *8,000	*6550 *15,100	5550 12,000	*5600 *12,100	4200 9,100	*4500 *9,750	3350 7,200	*1550 *3,450	1300 2,800	16 970 670
-3000 mm -120 in	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6250 *14,250	5300 11,400	*5950 *12,900	4000 8,550	*4800 *10,400	3150 6,750	*1700 *3,700	1300 2,850	16 610 660
-4500 mm -180 in	kg lb	*2800 *6,250	*2800 *6,250	*3300 *7,400	*3300 *7,400	*4400 *9,950	*4400 *9,950	*6550 *14,850	5150 11,100	*6200 *13,400	3850 8,250	5000 10,700	3050 6,500	*1850 *4,100	1350 2,950	16 090 640
-6000 mm -240 in	kg lb	*3450 *7,650	*3450 *7,650	*4000 *8,950	*4000 *8,950	*5100 *11,500	*5100 *11,500	*7200 *16,350	5150 11,050	*6300 *13,600	3800 8,150	4900 10,550	2950 6,400	*2100 *4,600	1450 3,200	15 410 610
-7500 mm -300 in	kg lb	*4100 *9,150	*4100 *9,150	*4750 *10,700	*4750 *10,700	*5950 *13,450	*5950 *13,450	*7900 *17,050	5200 11,200	*6250 *13,500	3800 8,200	4900 10,600	2950 6,400	*2450 *5,400	1600 3,500	14 540 570
-9000 mm -360 in	kg lb	*4850 *10,800	*4850 *10,800	*5600 *12,600	*5600 *12,600	*7000 *15,800	*7000 *15,800	*7550 *16,300	5350 11,500	*6050 *13,050	3900 8,350	4950 10,700	3000 6,500	*2950 *6,600	1800 4,050	13 450 530
-10 500 mm -420 in	kg lb	*5600 *12,600	*5600 *12,600	*6600 *14,850	*6600 *14,850	*8250 *18,550	*8250 *18,550	*7000 *15,000	5550 11,950	*5650 *12,100	4050 8,700	*4650 *10,000	3150 6,800	*3200 *7,050	2200 4,900	12 080 470
-12 000 mm -480 in	kg lb			*7750 *17,500	*7750 *17,500	*7800 *16,500	*7800 *16,500	*6100 *12,900	5850 12,650	*4950 *10,450	4250 9,250	*4050 *8,450	3350 7,250	*3350 *7,400	2850 6,500	10 300 400



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off (continued)



		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in		15 000 mm/600 in		16 500 mm/660 in				mm in
														
12 000 mm 480 in	kg lb					*1800 *3,200	*1800 *3,200					*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb					*1950 *4,300	*1950 *4,300					*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb					*2000 *4,350	*2000 *4,350	*2050 *3,850	*2050 *3,850			*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb					*2050 *4,500	*2050 *4,500	*2050 4,350	2050			*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb			*4,850	*4,850	*2150 *4,700	*2150 *4,700	*2150 *4,650	2000 4,200	*1650 1600		*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb			*2400 *5,250	*2400 *5,250	*2300 *5,000	*2300 *5,000	*2250 *4,850	1900 4,050	*2100 *3,850	1550 3,300	*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb	*2900 *6,250	*2900 *6,250	*2650 *5,750	*2650 *5,750	*2450 *5,350	2250 4,750	*2350 *5,100	1850 3,900	*2250 *4,500	1500 3,150	*1350 *2,950	*1350 *2,950	17 260 680
1500 mm 60 in	kg lb	*3200 *6,950	3150 6,750	*2900 *6,250	2550 5,500	*2650 *5,750	2100 4,500	*2450 *5,350	1750 3,700	2350 *4,850	1450 3,050	*1400 *3,050	1300 2,850	17 300 680
0 mm 0 in	kg lb	*3550 *7,650	2900 6,250	*3100 *6,750	2400 5,150	*2800 *6,100	2000 4,250	*2600 *5,650	1650 3,550	2300 *4,850	1400 2,950	*1450 *3,200	1300 2,800	17 200 680
-1500 mm -60 in	kg lb	*3800 *8,250	2700 5,850	*3350 *7,200	2250 4,800	*3000 *6,450	1900 4,000	2600 5,550	1600 3,400	2250 *4,300	1350 2,850	*1550 *3,450	1300 2,800	16 970 670
-3000 mm -120 in	kg lb	*4050 *8,750	2550 5,500	3450 7,450	2150 4,600	2950 6,300	1800 3,850	2550 5,400	1550 3,250	*1900 1300		*1700 *3,700	1300 2,850	16 610 660
-4500 mm -180 in	kg lb	4050 8,700	2450 5,300	3400 7,250	2050 4,400	2900 6,200	1750 3,750	2500 5,350	1500 3,200			*1850 *4,100	1350 2,950	16 090 640
-6000 mm -240 in	kg lb	4000 8,600	2400 5,200	3350 7,200	2000 4,350	2850 6,150	1700 3,700	2500 *5,300	1500 3,200			*2100 *4,600	1450 3,200	15 410 610
-7500 mm -300 in	kg lb	4000 8,600	2400 5,200	3350 7,200	2000 4,350	2850 6,200	1750 3,750					*2450 *5,400	1600 3,500	14 540 570
-9000 mm -360 in	kg lb	4050 8,700	2450 5,300	3400 7,350	2050 4,450							*2950 6,600	1800 4,050	13 450 530
-10 500 mm -420 in	kg lb	*3900 *8,300	2550 5,550	*3250	2200							*3200 *7,050	2200 4,900	12 080 470
-12 000 mm -480 in	kg lb											*3350 *7,400	2850 6,500	10 300 400



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

326 Hydraulic Excavator Specifications


SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off

7.85 m (25'9") 10.2 m (33'6")

SLR 7.85A



700 mm (28") Triple Grouser Shoes




2590 mm (8'6")

3830 mm (12'7")



4640 mm (15'3")

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				
																mm in
12 000 mm 480 in	kg lb													*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb													*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb													*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb													*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb													*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb													*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb			*4850 *10,700	*4850 *10,700							*3250 *7,000	*3250 *7,000	*1350 *2,950	1350 2,900	17 260 680
1500 mm 60 in	kg lb			*1600 *3,650	*1600 *3,650	*5500 *12,900	*5500 *12,900	*5750 *12,400	*5750 *12,400	*4450 *9,650	*4450 *9,650	*3700 *8,000	*3700 *8,000	*1400 *3,050	1300 2,800	17 300 680
0 mm 0 in	kg lb			*1650 *3,700	*1650 *3,700	*3650 *8,400	*3650 *8,400	*6700 *14,450	6000 12,900	*5100 *11,000	4550 9,750	*4150 *8,950	3550 7,650	*1450 *3,200	1250 2,750	17 200 680
-1500 mm -60 in	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3550 *8,000	*3550 *8,000	*6550 *15,100	5500 11,850	*5600 *12,100	4150 8,950	*4500 *9,750	3300 7,100	*1550 *3,450	1250 2,750	16 970 670
-3000 mm -120 in	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6250 *14,250	5200 11,200	*5950 *12,900	3900 8,450	*4800 *10,400	3100 6,650	*1700 *3,700	1300 2,800	16 610 660
-4500 mm -180 in	kg lb	*2800 *6,250	*2800 *6,250	*3300 *7,400	*3300 *7,400	*4400 *9,950	*4400 *9,950	*6550 *14,850	5100 10,950	*6200 *13,400	3800 8,150	4900 10,550	3000 6,400	*1850 *4,100	1350 2,900	16 090 640
-6000 mm -240 in	kg lb	*3450 *7,650	*3450 *7,650	*4000 *8,950	*4000 *8,950	*5100 *11,500	*5100 *11,500	*7200 *16,350	5050 10,900	6250 13,450	3750 8,000	4850 10,450	2900 6,300	*2100 *4,600	1450 3,150	15 410 610
-7500 mm -300 in	kg lb	*4100 *9,150	*4100 *9,150	*4750 *10,700	*4750 *10,700	*5950 *13,450	*5950 *13,450	*7900 *17,050	5150 11,050	*6250 *13,500	3750 8,050	4850 10,450	2900 6,300	*2450 *5,400	1550 3,450	14 540 570
-9000 mm -360 in	kg lb	*4850 *10,800	*4850 *10,800	*5600 *12,600	*5600 *12,600	*7000 *15,800	*7000 *15,800	*7550 *16,300	5250 11,350	*6050 *13,050	3800 8,250	4900 10,600	3000 6,400	2900 6,500	1800 4,000	13 450 530
-10 500 mm -420 in	kg lb	*5600 *12,600	*5600 *12,600	*6600 *14,850	*6600 *14,850	*8250 *18,750	*8250 *18,300	*7000 *15,000	5450 11,800	*5650 *12,100	3950 8,600	*4650 *10,000	3100 6,700	*3200 *7,050	2150 4,850	12 080 470
-12 000 mm -480 in	kg lb			*7750 *17,500	*7750 *17,500	*7800 *16,500	*7800 *16,500	*6100 *12,900	5750 12,500	*4950 *10,450	4200 9,100	*4050 *8,450	3300 7,150	*3350 *7,400	2800 6,400	10 300 400



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




(continued on next page)

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off (continued)

7.85 m (25'9") 10.2 m (33'6")

SLR 7.85A



		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in		15 000 mm/600 in		16 500 mm/660 in				mm in
12 000 mm 480 in	kg lb					*1800 *3,200	*1800 *3,200					*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb					*1950 *4,300	*1950 *4,300					*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb					*2000 *4,350	*2000 *4,350	*2050 *3,850	*2050 *3,850			*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb					*2050 *4,500	*2050 *4,500	*2050 4,300	2000			*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb			*4,850 *5,250	*4,850 *5,250	*2150 *4,700	*2150 *4,700	*2150 *4,650	1950 4,150	*1650 1550		*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb			*2400 *5,250	*2400 *5,250	*2300 *5,000	*2300 *4,950	*2250 *4,850	1900 4,000	*2100 *3,850	1550 3,250	*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb	*2900 *6,250	*2900 *6,250	*2650 *5,750	*2650 *5,750	*2450 *5,350	2200 4,700	*2350 *5,100	1800 3,850	*2250 *4,500	1500 3,100	*1350 *2,950	1350 2,900	17 260 680
1500 mm 60 in	kg lb	*3200 *6,950	3100 6,700	*2900 *6,250	2550 5,400	*2650 *5,750	2100 4,450	*2450 *5,350	1700 3,650	2300 *4,850	1400 3,000	*1400 *3,050	1300 2,800	17 300 680
0 mm 0 in	kg lb	*3550 *7,650	2900 6,200	*3100 *6,750	2350 5,050	*2800 *6,100	1950 4,200	*2600 5,600	1650 3,500	2250 4,800	1350 2,900	*1450 *3,200	1250 2,750	17 200 680
-1500 mm -60 in	kg lb	*3800 *8,250	2700 5,750	*3350 *7,200	2200 4,750	*3000 6,400	1850 3,950	2550 5,450	1550 3,300	2200 *4,300	1300 2,800	*1550 *3,450	1250 2,750	16 970 670
-3000 mm -120 in	kg lb	*4050 *8,750	2550 5,450	3400 7,350	2100 4,500	2900 6,200	1750 3,800	2500 5,350	1500 3,200	*1900 1300		*1700 *3,700	1300 2,800	16 610 660
-4500 mm -180 in	kg lb	4000 8,600	2450 5,200	3350 7,150	2050 4,350	2850 6,100	1700 3,650	2450 5,250	1500 3,150			*1850 *4,100	1350 2,900	16 090 640
-6000 mm -240 in	kg lb	3950 8,450	2400 5,100	3300 7,100	2000 4,250	2800 6,050	1700 3,650	2450 5,300	1450 3,150			*2100 *4,600	1450 3,150	15 410 610
-7500 mm -300 in	kg lb	3950 8,450	2400 5,100	3300 7,100	2000 4,300	2850 6,100	1700 3,700					*2450 *5,400	1550 3,450	14 540 570
-9000 mm -360 in	kg lb	4000 8,600	2400 5,200	3350 7,250	2050 4,400							2900 6,500	1800 4,000	13 450 530
-10 500 mm -420 in	kg lb	*3900 *8,300	2550 5,500	*3250	2150							*3200 *7,050	2150 4,850	12 080 470
-12 000 mm -480 in	kg lb											*3350 *7,400	2800 6,400	10 300 400



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

326 Hydraulic Excavator Specifications


SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off

7.85 m (25'9") 10.2 m (33'6")

SLR 7.85A




600 mm (24") Single Grouser Shoes



2590 mm (8'6")

3830 mm (12'7")



4640 mm (15'3")

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
12 000 mm 480 in	kg lb													*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb													*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb													*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb													*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb													*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb													*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb			*4850 *10,700	*4850 *10,700							*3250 *7,000	*3250 *7,000	*1350 *2,950	1300 2,850	17 260 680
1500 mm 60 in	kg lb			*1600 *3,650	*1600 *3,650	*5500 *12,900	*5500 *12,900	*5750 *12,400	*5750 *12,400	*4450 *9,650	*4450 *9,650	*3700 *8,000	*3700 *8,000	*1400 *3,050	1250 2,750	17 300 680
0 mm 0 in	kg lb			*1650 *3,700	*1650 *3,700	*3650 *8,400	*3650 *8,400	*6700 *14,450	5900 12,700	*5100 *11,000	4450 9,600	*4150 *8,950	3500 7,550	*1450 *3,200	1250 2,700	17 200 680
-1500 mm -60 in	kg lb	*1600 *3,550	*1600 *3,550	*2150 *4,750	*2150 *4,750	*3550 *8,000	*3550 *8,000	*6550 *15,100	5400 11,650	*5600 *12,100	4100 8,800	*4500 *9,750	3250 6,950	*1550 *3,450	1250 2,700	16 970 670
-3000 mm -120 in	kg lb	*2200 *4,900	*2200 *4,900	*2700 *6,000	*2700 *6,000	*3850 *8,700	*3850 *8,700	*6250 *14,250	5100 11,050	*5950 *12,900	3850 8,300	*4800 *10,400	3050 6,550	*1700 *3,700	1250 2,750	16 610 660
-4500 mm -180 in	kg lb	*2800 *6,250	*2800 *6,250	*3300 *7,400	*3300 *7,400	*4400 *9,950	*4400 *9,950	*6550 *14,850	5000 10,750	*6200 *13,350	3700 8,000	4850 10,400	2950 6,300	*1850 *4,100	1300 2,850	16 090 640
-6000 mm -240 in	kg lb	*3450 *7,650	*3450 *7,650	*4000 *8,950	*4000 *8,950	*5100 *11,500	*5100 *11,500	*7200 *16,350	5000 10,700	6150 13,200	3650 7,850	4750 10,250	2850 6,150	*2100 *4,600	1400 3,050	15 410 610
-7500 mm -300 in	kg lb	*4100 *9,150	*4100 *9,150	*4750 *10,700	*4750 *10,700	*5950 *13,450	*5950 *13,450	*7900 *17,050	5050 10,850	6150 13,250	3700 7,900	4750 10,250	2850 6,150	*2450 *5,400	1550 3,400	14 540 570
-9000 mm -360 in	kg lb	*4850 *10,800	*4850 *10,800	*5600 *12,600	*5600 *12,600	*7000 *15,800	*7000 *15,800	*7550 *16,300	5150 11,150	*6050 *13,050	3750 8,100	4800 10,400	2900 6,300	2850 6,400	1750 3,900	13 450 530
-10 500 mm -420 in	kg lb	*5600 *12,600	*5600 *12,600	*6600 *14,850	*6600 *14,850	*8250 *18,750	*8250 *18,000	*7000 *15,000	5350 11,600	*5650 *12,100	3900 8,450	*4650 *10,000	3050 6,550	*3200 *7,050	2100 4,750	12 080 470
-12 000 mm -480 in	kg lb			*7750 *17,500	*7750 *17,500	*7800 *16,500	*7800 *16,500	*6100 *12,900	5700 12,300	*4950 *10,450	4150 8,950	*4050 *8,450	3250 7,050	*3350 *7,400	2750 6,300	10 300 400



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

(continued on next page)

326 Hydraulic Excavator Specifications

SLR Boom Lift Capacities – Counterweight: 6.7 mt (14,770 lb) – without Bucket, Heavy Lift: Off (continued)



		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in		15 000 mm/600 in		16 500 mm/660 in				mm in
														
12 000 mm 480 in	kg lb					*1800 *3,200	*1800 *3,200					*1350 *3,000	*1350 *3,000	13 940 550
10 500 mm 420 in	kg lb					*1950 *4,300	*1950 *4,300					*1300 *2,850	*1300 *2,850	14 930 590
9000 mm 360 in	kg lb					*2000 *4,350	*2000 *4,350	*2050 *3,850	2000 *3,850			*1300 *2,800	*1300 *2,800	15 720 620
7500 mm 300 in	kg lb					*2050 *4,500	*2050 *4,500	*2050 *4,500	2000 4,200			*1300 *2,800	*1300 *2,800	16 330 650
6000 mm 240 in	kg lb			*4,850	*4,850	*2150 *4,700	*2150 *4,700	*2150 *4,650	1950 4,100	*1650 1550		*1300 *2,800	*1300 *2,800	16 780 660
4500 mm 180 in	kg lb			*2400 *5,250	*2400 *5,250	*2300 *5,000	2300 4,900	*2250 *4,850	1850 3,950	*2100 *3,850	1500 3,150	*1300 *2,850	*1300 *2,850	17 090 680
3000 mm 120 in	kg lb	*2900 *6,250	*2900 *6,250	*2650 *5,750	*2650 5,700	*2450 *5,350	2150 4,650	*2350 *5,100	1800 3,750	*2250 *4,500	1450 3,050	*1350 *2,950	1300 2,850	17 260 680
1500 mm 60 in	kg lb	*3200 *6,950	3050 6,600	*2900 *6,250	2500 5,350	*2650 *5,750	2050 4,350	*2450 *5,350	1700 3,600	2250 4,800	1400 2,950	*1400 *3,050	1250 2,750	17 300 680
0 mm 0 in	kg lb	*3550 *7,650	2850 6,100	*3100 *6,750	2350 4,950	*2800 *6,100	1950 4,100	2600 5,500	1600 3,400	2200 4,700	1350 2,850	*1450 *3,200	1250 2,700	17 200 680
-1500 mm -60 in	kg lb	*3800 *8,250	2650 5,650	*3350 *7,200	2200 4,650	2950 6,300	1800 3,900	2500 5,350	1550 3,250	2150 *4,300	1300 2,750	*1550 *3,450	1250 2,700	16 970 670
-3000 mm -120 in	kg lb	4050 8,650	2500 5,350	3350 7,200	2050 4,400	2850 6,100	1750 3,700	2450 5,250	1500 3,150	*1900 1250		*1700 *3,700	1250 2,750	16 610 660
-4500 mm -180 in	kg lb	3950 8,450	2400 5,100	3300 7,050	2000 4,250	2800 6,000	1700 3,600	2400 5,200	1450 3,100			*1850 *4,100	1300 2,850	16 090 640
-6000 mm -240 in	kg lb	3850 8,300	2350 5,000	3250 6,950	1950 4,200	2750 5,950	1650 3,550	2400 5,200	1450 3,100			*2100 *4,600	1400 3,050	15 410 610
-7500 mm -300 in	kg lb	3850 8,300	2350 5,000	3250 6,950	1950 4,200	2800 6,000	1700 3,600					*2450 *5,400	1550 3,400	14 540 570
-9000 mm -360 in	kg lb	3900 8,450	2400 5,100	3300 7,100	2000 4,300							2850 6,400	1750 3,900	13 450 530
-10 500 mm -420 in	kg lb	*3900 *8,300	2500 5,400	*3250	2100							*3200 *7,050	2100 4,750	12 080 470
-12 000 mm -480 in	kg lb											*3350 *7,400	2750 6,300	10 300 400



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

326 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

Undercarriage									Long		Long
Counterweight									4.6 mt (10,140 lb)		6.7 mt (14,770 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach		SLR
		mm	in	m³	yd³	kg	lb	%	R3.6 (11'10")	R2.95 (9'8")	SLR
Pin-On (No Quick Coupler)											
General Duty Capacity	CB	600	24	0.63	0.83	700	1,543	100	●	●	
	CB	750	30	0.86	1.13	836	1,843	100	●	●	
	CB	900	36	1.09	1.43	943	2,079	100	●	●	
	CB	1050	42	1.34	1.75	1011	2,229	100	⊙	●	
	CB	1200	48	1.58	2.07	1106	2,439	100	⊖	⊙	
	CB	1350	54	1.83	2.40	1202	2,650	100	○	⊖	
General Duty Capacity Wide Tips	CB	600	24	0.63	0.83	697	1,537	100	●	●	
	CB	750	30	0.86	1.13	834	1,839	100	●	●	
	CB	900	36	1.09	1.43	941	2,075	100	●	●	
	CB	1050	42	1.34	1.75	1008	2,223	100	⊙	●	
	CB	1200	48	1.58	2.07	1104	2,434	100	⊖	⊙	
	CB	1350	54	1.83	2.40	1199	2,644	100	○	⊖	
Heavy Duty	CB	600	24	0.52	0.68	730	1,608	100	●	●	
	CB	750	30	0.71	0.93	848	1,869	100	●	●	
	CB	900	36	0.91	1.19	941	2,075	100	●	●	
	CB	1050	42	1.12	1.46	1035	2,283	100	●	●	
	CB	1200	48	1.33	1.74	1107	2,440	100	⊙	●	
	CB	1350	54	1.54	2.01	1205	2,657	100	⊖	⊙	
	CB	1500	60	1.76	2.30	1298	2,861	100	X	X	
	CB	1650	66	1.97	2.58	1375	3,031	100	X	X	
Heavy Duty Power	CB	1050	42	1.12	1.47	1065	2,347	100	●	●	
	CB	1200	48	1.33	1.73	1143	2,519	100	⊙	●	
	CB	1350	54	1.53	2.01	1246	2,748	100	⊖	⊙	
Severe Duty	CB	600	24	0.52	0.68	752	1,657	90	●	●	
	CB	750	30	0.71	0.93	912	2,010	90	●	●	
	CB	900	36	0.91	1.19	995	2,194	90	●	●	
	CB	1050	42	1.12	1.46	1094	2,411	90	●	●	
	CB	1200	48	1.33	1.74	1172	2,583	90	⊙	●	
	CB	180	72	1.81	2.37	1146	2,526	100	○	⊖	
Clean Up	CB	180	72	1.81	2.37	1146	2,526	100	○	⊖	
	Ditch Cleaning	A	1200	48	0.57	0.75	364	803	100		
	A	1500	60	0.74	0.97	455	1,003	100			X
Maximum load with pin-on (payload + bucket)								kg	3449	3990	955
								lb	7,604	8,796	2,105

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

326 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility *(continued)*

Undercarriage									Long		Long
Counterweight									4.6 mt (10,140 lb)		6.7 mt (14,770 lb)
	Linkage	Width		Capacity		Weight		Fill	Reach		SLR
		mm	in	m³	yd³	kg	lb	%	R3.6 (11'10")	R2.95 (9'8")	SLR
With Cat Pin Grabber Coupler											
General Duty Capacity	CB	600	24	0.63	0.83	700	1,543	100	●	●	
	CB	750	30	0.86	1.13	836	1,843	100	●	●	
	CB	900	36	1.09	1.43	943	2,079	100	⦿	●	
	CB	1050	42	1.34	1.75	1011	2,229	100	⊖	⦿	
	CB	1200	48	1.58	2.07	1106	2,439	100	○	⊖	
	CB	1350	54	1.83	2.40	1202	2,650	100	◇	○	
General Duty Capacity Wide Tips	CB	600	24	0.63	0.83	697	1,537	100	●	●	
	CB	750	30	0.86	1.13	834	1,839	100	●	●	
	CB	900	36	1.09	1.43	941	2,075	100	⦿	●	
	CB	1050	42	1.34	1.75	1008	2,223	100	⊖	⦿	
	CB	1200	48	1.58	2.07	1104	2,434	100	○	⊖	
	CB	1350	54	1.83	2.40	1199	2,644	100	◇	○	
Heavy Duty	CB	600	24	0.52	0.68	730	1,608	100	●	●	
	CB	750	30	0.71	0.93	848	1,869	100	●	●	
	CB	900	36	0.91	1.19	941	2,075	100	●	●	
	CB	1050	42	1.12	1.46	1035	2,283	100	⊖	●	
	CB	1200	48	1.33	1.74	1107	2,440	100	○	⦿	
	CB	1350	54	1.54	2.01	1205	2,657	100	◇	⊖	
	CB	1500	60	1.76	2.30	1298	2,861	100	◇	○	
	CB	1650	66	1.97	2.58	1375	3,031	100	X	X	
Heavy Duty Power	CB	1050	42	1.12	1.47	1065	2,347	100	⊖	●	
	CB	1200	48	1.33	1.73	1143	2,519	100	○	⦿	
	CB	1350	54	1.53	2.01	1246	2,748	100	◇	⊖	
Heavy Duty Pin Grabber Performance	CB	750	30	0.70	0.91	876	1,931	100	●	●	
	CB	1050	42	1.08	1.42	1105	2,436	100	⊖	●	
	CB	1200	48	1.28	1.68	1186	2,614	100	○	⦿	
	CB	1350	54	1.49	1.94	1292	2,849	100	◇	⊖	
	CB	1500	60	1.69	2.21	1398	3,082	100	◇	○	
Severe Duty	CB	600	24	0.52	0.68	752	1,657	90	●	●	
	CB	750	30	0.71	0.93	912	2,010	90	●	●	
	CB	900	36	0.91	1.19	995	2,194	90	●	●	
	CB	1050	42	1.12	1.46	1094	2,411	90	⦿	●	
	CB	1200	48	1.33	1.74	1172	2,583	90	⊖	⦿	
Severe Duty Pin Grabber Performance	CB	600	24	0.51	0.66	829	1,828	90	●	●	
	CB	900	36	0.88	1.16	1057	2,331	90	●	●	
	CB	1050	42	1.08	1.42	1165	2,568	90	⦿	●	
	CB	1200	48	1.28	1.68	1252	2,760	100	○	⦿	
Clean Up	CB	180	72	1.81	2.37	1146	2,526	100	◇	○	
Maximum load with pin-on (payload + bucket)								kg	2923	3464	429
								lb	6,444	7,636	945

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

326 Hydraulic Excavator Specifications

Attachments Offering Guide

Not all attachments available in all regions. Consult your Cat dealer for specific configurations available in your region.

PIN-ON ATTACHMENTS

Undercarriage		Long	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach	
Stick Length		2.95 m (9'8")	3.6 m (11'10")
Hydraulic Hammers	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120E S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130E S	✓	✓
	H140E S	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓
	MP318 D Jaws	✓	✓
	MP318 P Jaws	✓	✓
	MP318 S Jaws	✓	✓
	MP318 U Jaws	✓	✓
	MP324 CC Jaws	✓	✓
	MP324 D Jaws	✓	✓
	MP324 P Jaws	✓	✓*
	MP324 S Jaws	✓	✓
	MP324 TS Jaws	✓	✓
	MP324 U Jaws	✓	✓
Demolition and Sorting Grapples	G320B	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓
	S3035	✓*	
Compactor	CVP110	✓	✓
Pulverizers	P215	✓	✓
	P225	✓	✓
Orange Peel Grapples		✓	✓
Mulchers	HM4015	✓	✓
Thumbs		✓	✓
Rakes		✓	✓
Rippers		✓	✓
Cat Pin Grabber Couplers		✓	✓

*Working range front only

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Long	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach	
Stick Length		2.95 m (9'8")	3.6 m (11'10")
Hydraulic Hammers	H120 GC	✓	✓
	H120 GC S	✓	✓
	H120E S	✓	✓
	H130 GC	✓	✓
	H130 GC S	✓	✓
	H130E S	✓	✓
	H140E S	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓
	MP318 D Jaws	✓	✓
	MP318 P Jaws	✓	✓
	MP318 S Jaws	✓	✓
	MP318 U Jaws	✓	✓
	MP324 CC Jaws	✓	
	MP324 D Jaws	✓	
	MP324 P Jaws	✓*	
	MP324 S Jaws	✓	
	MP324 TS Jaws	✓*	
	MP324 U Jaws	✓*	
Demolition and Sorting Grapples	G320B	✓*	
Mobile Scrap and Demolition Shears	S3025	✓	✓
Compactor	CVP110	✓	✓
Pulverizers	P215	✓	✓
	P225	✓	
Mulchers	HM4015	✓	✓
Thumbs		✓	✓
Rakes		✓	✓
Rippers		✓	✓

*Working range front only

BOOM-MOUNT ATTACHMENTS

Undercarriage		Long	
Counterweight		4.6 mt (10,140 lb)	
Boom Type		Reach	
Mobile Scrap and Demolition Shears	S2050	✓	
	S3050	✓	

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
CAT TECHNOLOGY			HYDRAULIC SYSTEM		
Cat Product Link™	✓		Electronic main control valve	✓	
Cat GRADE with 2D*	✓		Boom and stick regeneration circuits	✓	
Cat GRADE with Advanced 2D*		✓	Automatic hydraulic oil warm up	✓	
Cat GRADE with 3D*		✓	Automatic two-speed travel	✓	
2D E-Fence (Body Avoidance/E-Ceiling/ Floor/Reach/Swing)*	✓		Boom and stick drift reduction valve	✓	
Cat GRADE with Assist*:	✓		Boom and stick lowering check valves		✓
– Boom Assist			Hammer return filter circuit		✓
– Bucket Assist			Combined Tool Control (two pump, one/two way high-pressure flow)		✓
– Swing Assist			Medium-pressure circuit		✓
– Grade Assist			Quick coupler circuit		✓
– Lift Assist			Fine swing control function		✓
Cat PAYLOAD*:	✓		Common quick coupler circuit for Cat pin grabber and CW dedicated		✓
– Static weigh			Bucket cylinder for CB2 Linkage		✓
– Auto calibration			Bucket cylinder for A Linkage (for SLR)		✓
– Payload information			Straight travel drain line for Pin Grabber QC		✓
Remote Troubleshooting		✓	Tandem type electronic main pump	✓	
Remote Flash		✓	Element type main hydraulic filter	✓	
ENGINE			UNDERCARRIAGE AND STRUCTURES		
Three selectable modes: Power, Smart, Eco	✓		Track guiding guard, segmented two pieces	✓	
One-touch low idle with automatic engine speed control	✓		HD bottom guard		✓
Auto engine idle shutdown	✓		HD travel motor guard	✓	
4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓		Swivel guard	✓	
52° C (125° F) high-ambient cooling capacity with derate	✓		Grease lubricated track	✓	
–18° C (0° F) cold start capability	✓		Swing drive and motor, and swing bearing for higher swing torque	✓	
–32° C (–25° F) cold start capability		✓	4.6 mt (10,140 lb) counterweight	✓	
Sealed double element air filter with integrated precleaner	✓		6.7 mt (14,770 lb) counterweight		✓
Cold start block heaters		✓	600 mm (24") single grouser track shoes		✓
2 × 115 amp. dual alternator	✓		700 mm (28") triple grouser track shoes		✓
Electric fuel priming pump	✓		790 mm (31") triple grouser track shoes	✓	
Reversible electric cooling fans	✓		Tie-down points on base frame (ISO 15818 Compliant)	✓	
Two-stage fuel filtration system with water separator and indicator	✓				
Biodiesel capable (up to B20)	✓				

(continued on next page)

*Optional on machines equipped with a Super Long Reach boom.

326 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			SERVICE AND MAINTENANCE		
Boom cylinders		✓	Sampling ports for Scheduled Oil Sampling (S·O·S SM)	✓	
5.9 m (19'4") Reach boom	✓		Ground-level and platform-level engine oil dipsticks	✓	
10.2 m (33'6") Super Long Reach boom		✓	Electric refueling pump with auto shut off		✓
3.6 m (11'10") Reach stick, CB1 linkage		✓	SAFETY AND SECURITY		
2.95 m (9'8") Reach stick, CB1 linkage	✓		Bluetooth® receiver	✓	
7.85 m (25'9") Super Long Reach stick, A linkage		✓	Travel alarm		✓
Bucket linkage, CB1 family with lifting eye Cat GRADE	✓		Rearview camera and right-hand side mirror	✓	
Bucket linkage, CB1 family with lifting eye Cat GRADE		✓	Right-side-view camera	✓	
Bucket linkage, A family with lifting eye, Super Long Reach, Cat GRADE		✓	360° visibility*		✓
ELECTRICAL SYSTEM			Ground-level engine shutoff switch	✓	
Two 1,000 CCA maintenance free batteries	✓		Right-hand handrail and hand hold	✓	
Programmable time-delay LED working lights	✓		Signaling/warning horn	✓	
LED chassis light, left-hand/right-hand boom lights, cab lights – 850 lumens	✓		*Optional on machines equipped with a Super Long Reach boom.		
360° lighting		✓			
Centralized electrical disconnect switch	✓				
After engine shutdown 90 seconds programmable time delay LED working lights: One chassis mounted, one left-hand boom mounted	✓				

326 Dealer Installed Kits and Attachments

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Right-hand electrical pedal (two-way) for tool control
- Radial lower wiper windshield (for comfort and deluxe cab only)
- Dual exit rear window kit (Canadian regulation)
- Rain protector plus cab light cover
- Polycarbonate roof hatch (for comfort cab only)
- Front windshield laminated glass (P5A glass, EU demolition regulation)

SAFETY AND SECURITY

- Seat belt, retractable, 76 mm (3") width

GUARDS

- HD swivel guard (16 mm/0.63" thick)
- Side rubber bumper guard
- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Cab vandalism guard

ELECTRICAL

- Jump start wiring

Cab Options

	Deluxe
ROPS, standard sound suppression	●
High-resolution 254 mm (10") LCD touchscreen monitor	●
High-resolution 254 mm (10") LCD touchscreen monitor + additional monitor (only for use with Cat GRADE with Advanced 2D or Cat GRADE with 3D)	○
Automatic bi-level air conditioner	●
Jog dial and shortcut keys for monitor control	●
Keyless push-to-start engine control	●
Height-adjustable console, infinite with no tool	●
Tilt-up left-side console	●
Heated seat with air-adjustable suspension	●
51 mm (2") seat belt	●
Bluetooth integrated radio with USB ports	●
12V DC outlets (×2)	●
Document storage	●
Cup and bottle holders	●
Openable two-piece front window	●
Upper radial wiper with washer	●
Openable polycarbonate skylight hatch	●
LED dome and lower interior lights	●
Roller front sunscreen	●
Roller rear sunscreen	●
Rear window emergency exit	○
Washable floor mat	●
Beacon ready	●

● Standard

○ Optional

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2019 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ2557 (10-2019)
Build Number: 07A
(N Am)

