High-Performance Door ASSA ABLOY RR3000 ISO

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



THERMAL INSULATION

ASISA ARLOW

50mm thick insulated door panel. Minimal heat loss. No condensation. Outstanding U-Value. **CLEAN DESIGN**

Side frames and covers feature clean design.

FAST SPEEDS

A BRIE HE SHE

Station and the second

Opening speeds of up to 2.2m/s helps maintain thermal performance while improving the flow of traffic. The ASSA ABLOY RR3000 ISO combines the superior thermal performance of a sectional door with the fast speeds and operational efficiency of a high-performance door. This next generation, hybrid solution from ASSA ABLOY Entrance Systems opens and closes with maximum speed and minimum energy loss.



For distributors, logistic centers, public facility warehouses, general manufactures and much more – the ASSA ABLOY RR3000 ISO meets the requirements of highly specific and complex needs. Its thick thermal insulated door panel keeps indoor conditions stable and outdoor weather where it belongs. Plus, its attractive, modern design can enhance a building's facade.

Sustainable solutions for energy savings

Large, energy-hungry facilities face difficult environmental challenges. Entrance automation is the first step to controlling excessive energy usage and improving building performance and efficiency. The 50mm thick, thermal insulated door panel on the ASSA ABLOY RR3000 ISO features a thermal break within each door slat, ensuring minimal heat flow from inside to outside. This design guarantees optimal thermal performance, with minimal heat loss and no condensation. Improved sealing around the perimeter of the door limits air leakage and helps support an in-




creased U-Value. The ASSA ABLOY RR3000 ISO can optimize the energy-performance of any building and help you meet your sustainability goals.

All-weather design for all day operation


The ASSA ABLOY RR3000 ISO has a seamless construction with no hinges, brackets or rollers for continuous usage and smooth operations all day, every day. The door panel is designed to prevent the slats from touching one another as the door rolls up and down. This makes the ASSA ABLOY RR3000 ISO incredibly quiet, durable and less sensitive to wear and tear.

These smart design elements also make the ASSA ABLOY RR3000 ISO simple to maintain. In high traffic areas, doors face the risk of being impacted. If the ASSA ABLOY RR3000 ISO is hit, the damaged slat can be easily removed and replaced in minutes, while the door remains operational and business keeps running.

Drawing ASSA ABLOY RR3000 ISO

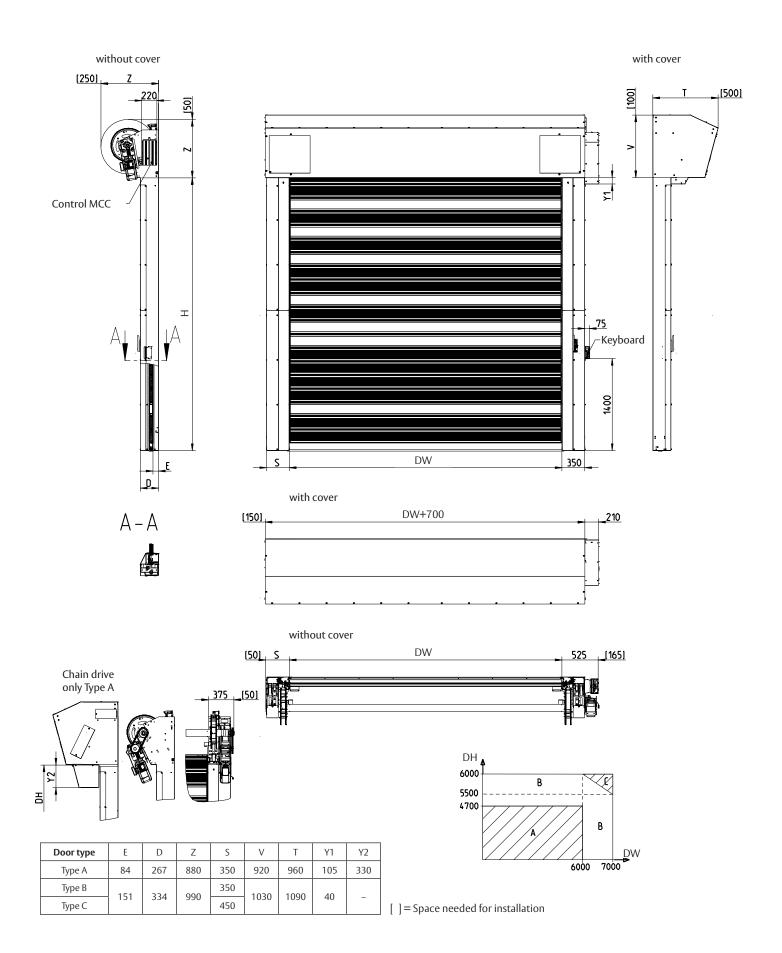

Fixing Plan ASSA ABLOY RR3000 ISO

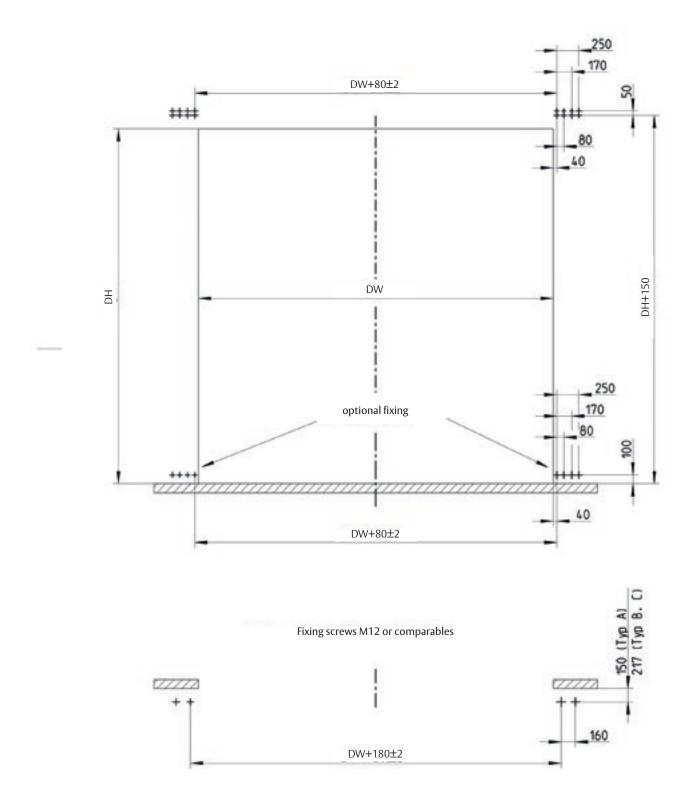

Technical Information ASSA ABLOY RR3000 ISO

| Speeds | |
|---|---|
| Opening Speed | Up to 2,2 m per second |
| Closing Speed | Up to 0,7 m per second |
| Door Dimensions | |
| Max Width | 7000 mm |
| Max Height | 6000 mm |
| Min Width | 1250 mm |
| Min Height | 2500 mm |
| Safety Features | |
| Light Curtain | ✓ |
| Self-testing safety edge + door line photocell | • |
| Operation during power failure | |
| Emergency crank (limited to partial height by spring force) | × |
| Manual opening and closing by means of a chain hoist | • |
| Wind Resistance | |
| Wind Resistance (EN 12424) | DW ≤ 5000 mm: class 3 DW > 5000 mm: class 2 |
| Curtain | |
| Heat transfer coefficient | Door blade 1,4 W/m²K Complete door min 2,0 W/m²K (Depending on door size and specification) |
| Temperature range | -20°C to +40°C (mounting side) |
| Extended seal | • |
| Door Components | |
| Curtain Slats | Insulated sandwiched slats (50 × 200 mm) with thermally separated metal sheet trays ✓ RAL 9006 Painting in RAL colours |
| Window Slats | • Framed with anodized aluminum |
| Side Frames | Galvanized steel side framesRAL powder coated optional |
| Top and Drive Cover | Anodized aluminumRAL powder coated optional |
| Control and Drive System | |
| MCC VectorControl™ | Standard, variable frequency drive with soft start / soft stop and absolute encoder |
| Motor Power | 1,1 KW |
| Protection | IP 55 |
| Mains Connection | 3L/(N)/PE 380/400/415/440/480 V, 50/60 Hz ² |
| Chain drive to reduce space for | |

•

Chain drive to reduce space for installation on the side



Smart Header Design

The design prevents door slats from touching one another as door opens and closes for fast, smooth and quiet operations.



Surface Structure Increases stiffness and wind load.



Light Grid

Smart safety system is integrated into the side frames and eliminates contact with objects and people in doorway.

We offer various options and actuation devices.

Option✓ Standard



Why choose a high-performance door

- A high-performance door improves the efficiency and performance of any building.
- Increases the overall U-value of a building when installed at busy entrances that require a high number of open and close cycles per day.
- Doors only open and close for each individual unit of traffic through the opening – doors are not left open during processes such as loading and unloading.
- Improves interior conditions for a comfortable work environment.
- Ensures the safe and effortless flow of vehicles, goods and people.

ASSA ABLOY RR300 ISO: The next generation of rigid highperformance door

Efficient, sophisticated and safe, the RR3000 ISO from ASSA ABLOY Entrance Systems incorporates the thermal insulation of a traditional sectional door with the advanced performance of a high speed door. Its impressive styling adds elegance, and its resilient design ensures a long life of superior operations. With decades of expertise, we design our doors to be the perfect fit for your facility, taking pride to ensure high quality, superior safety and optimal performance.





ASSA ABLOY

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for the efficient flow of goods and people. Building on the long-term success of the Besam, Crawford, Albany and Megadoor brands, we offer our solutions under the ASSA ABLOY brand. Our products and services are dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.

ASSA ABLOY Entrance Systems is a division of ASSA ABLOY.

assaabloyentrance.com





ASSA ABLOY Entrance Systems

assaabloyentrance.com



Please enter ASSA ABLOY Entrance in the channel's search field.